

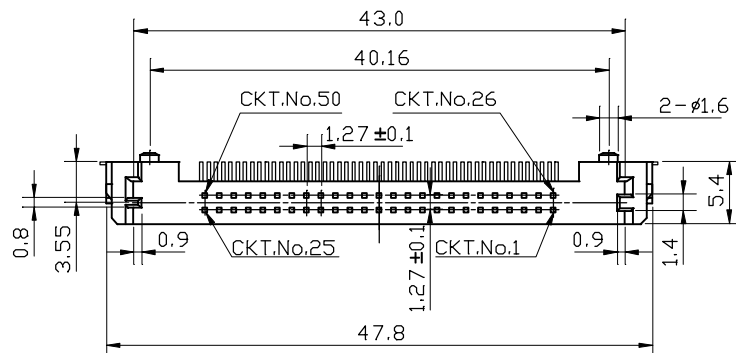
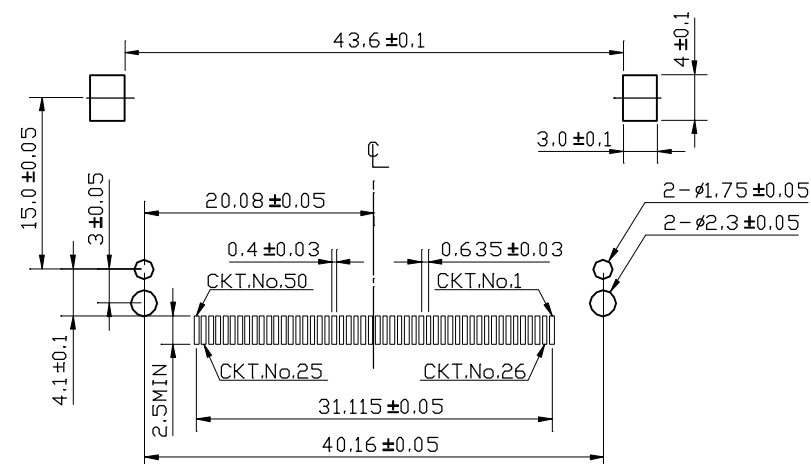
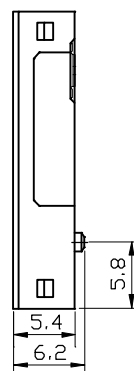


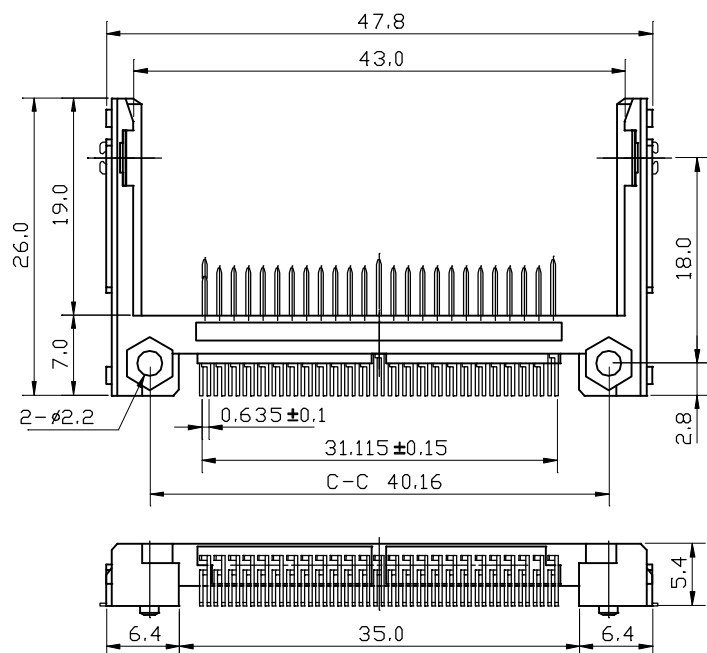

NOTES:
 MATERIAL
 Insulator:Glass Reinforced LCP UL94V-0
 Contacts:Brass Alloy
 Mount ear:Brass ; Tin plated overall
 CONTACT PLATING
 Contact area: Gold plating over 40u" Nickel
 Solder tail area:100u" tin plating over 40u" Nickel

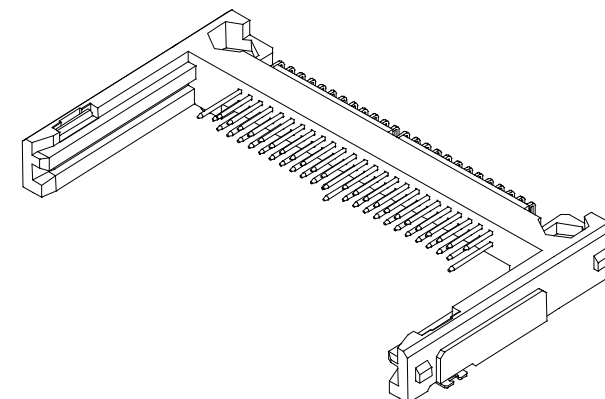

RECOMMENDED P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

CFC-PW40BE111-50-LF

SERIES TYPE 1 50WAY LEADFREE
 MALE EAR B TYPE NORMAL
 90°SMT POST TO POST 40.16mm
 STANDOFF 1.7mm

DESCRIPTION: CF CARD HEADER SMT 50P TYPE I (GO)