




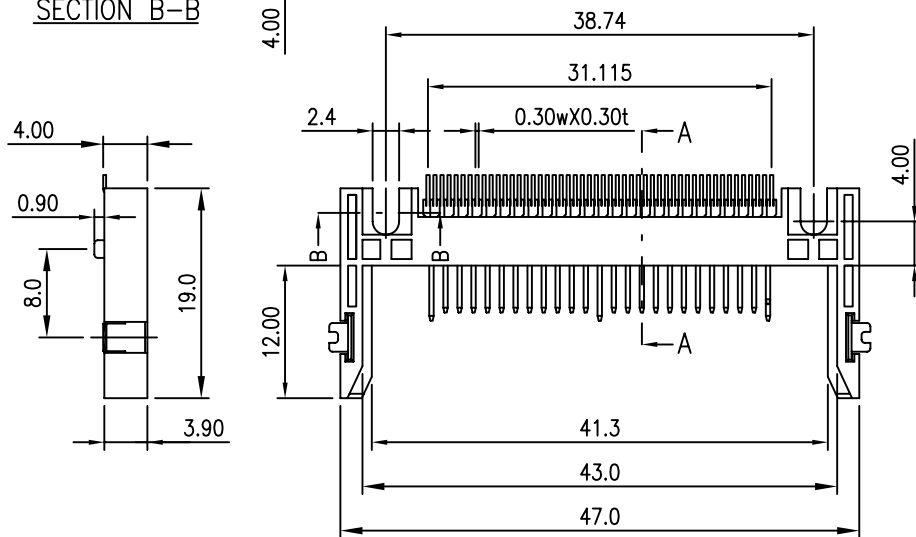


TABLE		
Pin Type	Interface Dim.	Pin No.
Detect	3.5mm (0.138in)	25,26
General	4.25mm (0.167in)	The Others
Power	5.0mm (0.197in)	01,13,38,50

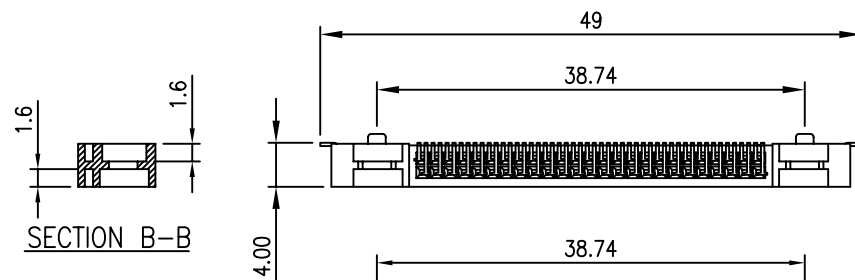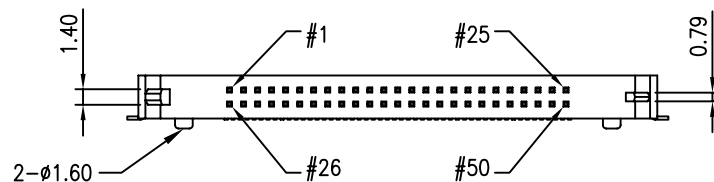


MATERIAL

HOUSING: HIGH TEMPERATURE THERMOPLASTIC.
CONTACT: COPPER ALLOY.
PED: BRASS.

PLATING

CONTACT: UNDERPLATED: 50 μ " MIN Ni.
CONTACT AREA: SELECT GOLD OVER Ni PLATED.
SOLDER TAIL: 100 μ " MIN Sn/Pb OVER Ni PLATED.
PED: 100 μ " MIN Sn/Pb OVER 50 μ " MIN Ni PLATED.

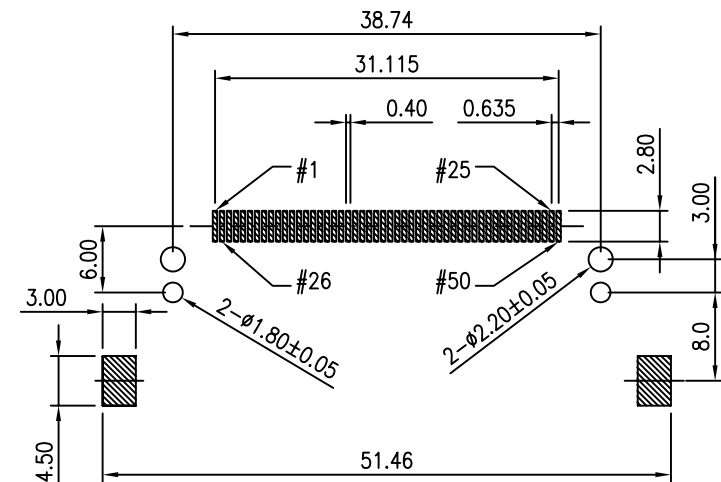

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

CFC-PW38BE001L12-50-LF
SERIES MALE 90°SMT EAR B TYPE POST TO POST 38.74mm
LONG 12.0mm LEADFREE 50WAY
NORMAL

DESCRIPTION: CF Card Header Slim Type Normal L=19mm Post:38.74mm