
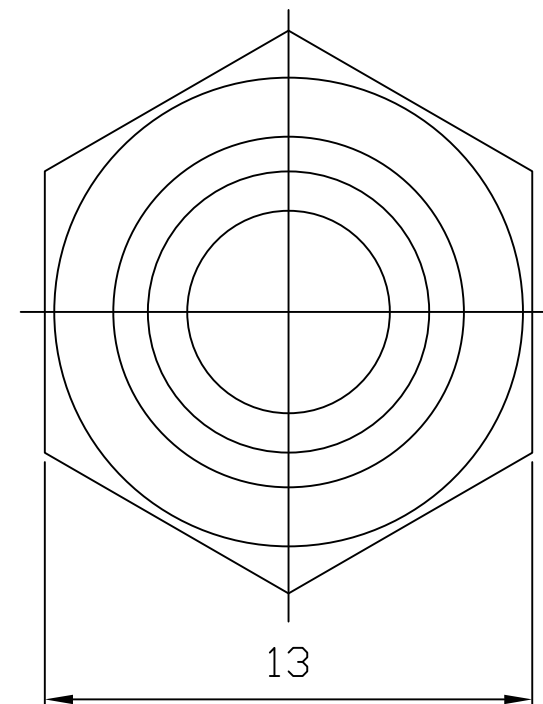


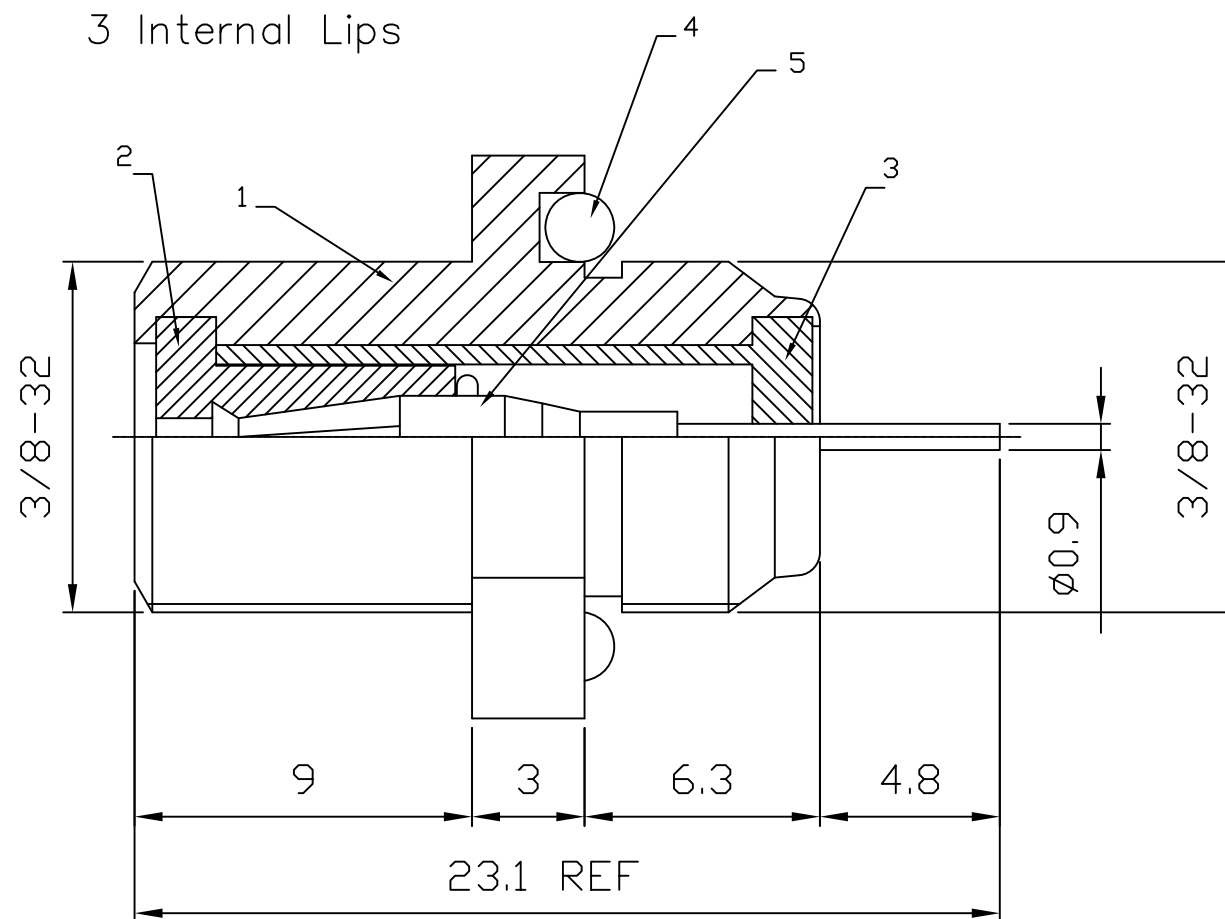

Impedance: 75 Ω
 Return Loss: -32dB Min @1GHz
 Frequency: 3GHz

5	PIN	PHOSPHOR+COOPER	GOLD	1
4	□ RING	RUBBER	BLACK	1
3	INSULATOR	DELIN	WHITE	1
2	INSULATOR	DELIN	WHITE	1
1	BODY	BRASS	NICKEL	1
MO	DESCRIPTION	MATERIAL	FINISH	QTY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

0.5-5	=±0.2
5-30	=±0.4
30-120	=±0.6
120-315	=±1
315-1000	=±1.6
1000-2000	=±2.4



ORDER INFORMATION

F-JSPN3G-75-LF

SERIES JACK PANEL SOLDER
 3GHz
 75 OHM
 LEADFREE

DESCRIPTION: F CONNECTOR