
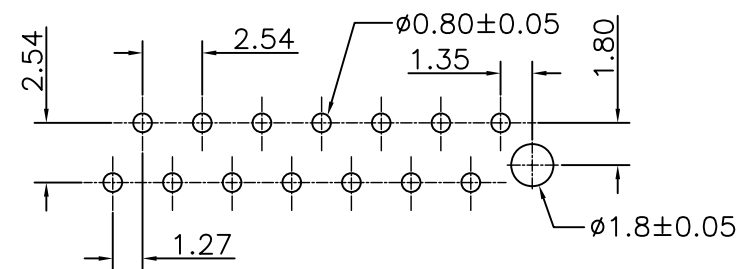

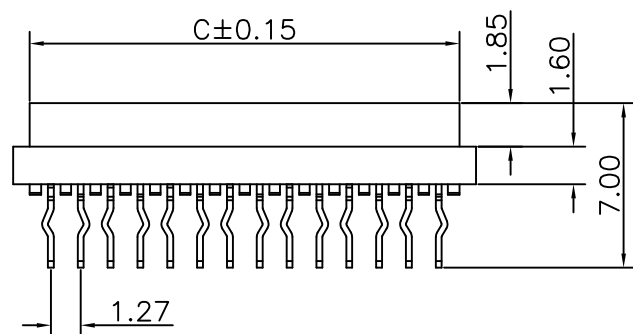


Pos	A	B	C
4	7.00	3.81	5.60
6	9.54	6.35	8.14
8	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92
22	29.86	26.67	28.46
24	32.40	29.21	31.00
26	34.94	31.75	33.54

Specifications:

Current rating:1.0A AC,DC
Voltage rating:30V AC, DC
Contact resistance:20m ohm Max
Insulation resistance:1000M ohm Min
Withstanding voltage:AC 500V AC/minute
Operating Temperature:-40°C ~ +105°C
Materials:
Insulator:High Temp Plastic UL94V-0
Contact material:Phosphor Bronze
Finish:Tin Plated

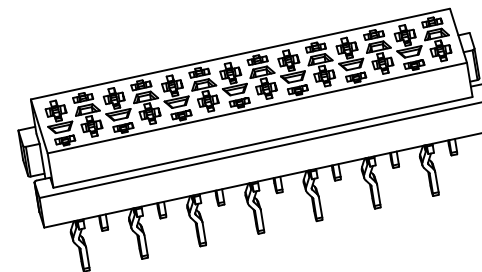

PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±



ORDER INFORMATION

MIM-SD-xx-LF
SERIES | LEADFREE
04-26WAY
DIP 180°
FEMALE

DESCRIPTION: 2.54mm PCB Connector 180° Type