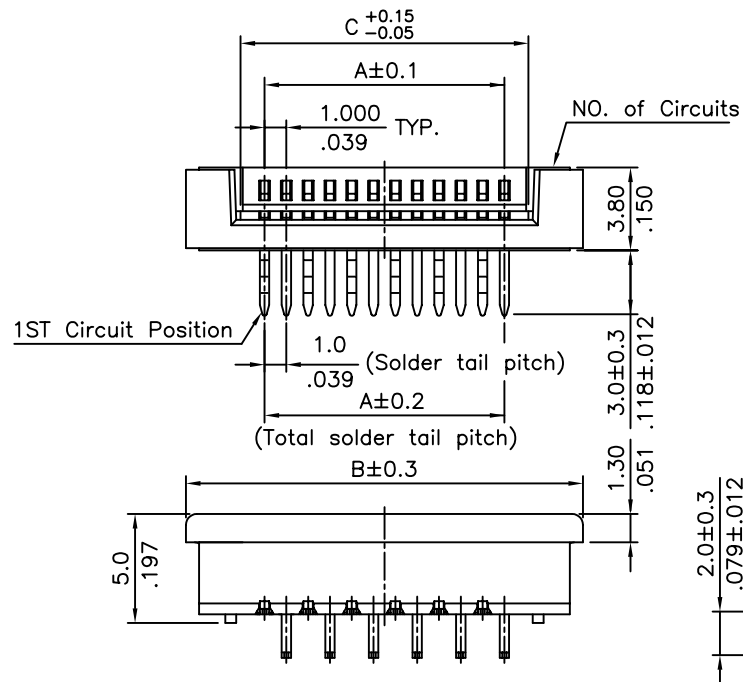


Material:

* Insulation: Nylon 6T UL 94V-0
Color Nature

* Slider: Nylon 6T UL 94V-0, Color Brown



* Contact: Phosphor Bronze

$$A = 1.00 * \text{No. of Spaces}$$



$$B = A + 7.2$$

$$C = A + 2.2$$


* Available in 4 through 32 circuits

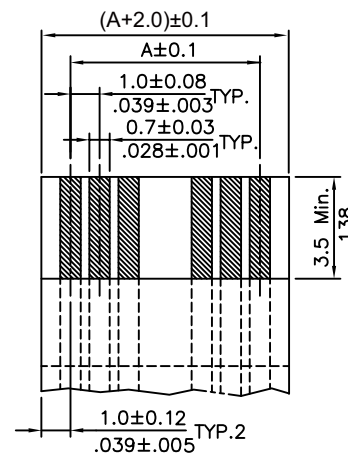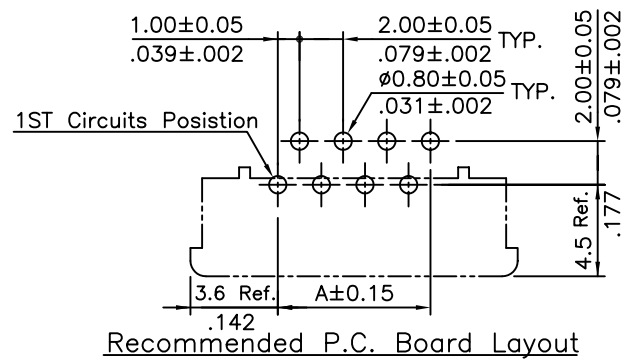

* ACCOMMODATED FFC

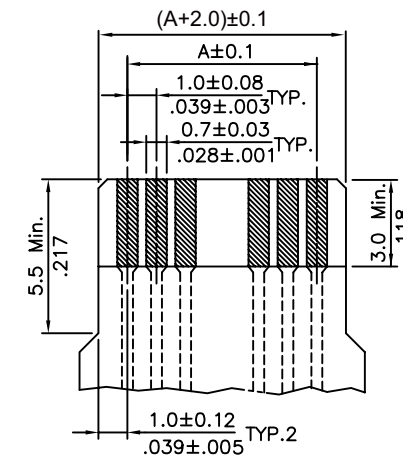

* ACCOMMODATED FPC



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ± 0.15
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°



ORDER INFORMATION

FPA-RZAL50-xx-LF
SERIES | | | | LEADFREE
| | | | 04~32WAY
| | | | LONG 5.0mm
DIP 90° | | | | L TYPE
| | | | SINGLE/CONTACT
ZIF

DESCRIPTION: 1.00mm(.039") R/A DIP TYPE ZIF FFC/FPC CONNECTOR