


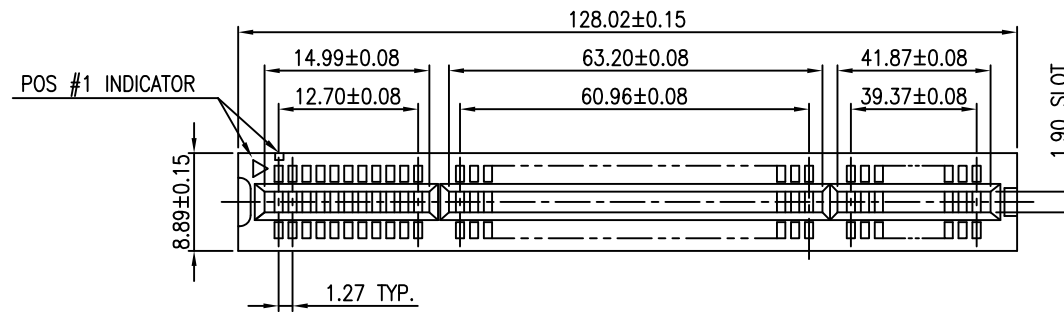

MATERIAL

INSULATOR: GLASS-REINFORCED THERMOPLASTIC,
UL94V-0 RATED.
CONTACT: COPPER ALLOY.
PLATING: MATING AREA- GOLD OVER NICKEL,
SOLDER AREA- TIN OVER NICKEL.

ELECTRICAL



VOLTAGE RATING: 250 VAC RMS.
CURRENT RATING: 3 AMP.
INSULATION RESISTANCE: 1,000 MEGOHMS MIN.
CONTACT RESISTANCE: 30 MILLIOHMS MAX.

MECHANICAL


CONTACT RETENTION: 460 GRAMS MIN PER CONTACT.
INSERTION FORCE: 230 GRAMS MAX PER CONTACT PAIR.
WITHDRAWAL FORCE: 15 GRAMS MIN PER CONTACT PAIR

ENVIRONMENTAL

TEMPERATURE RANGE: -55°C TO +85°C.
SOLDERABILITY : 260°C±5°C/10sec±1sec.

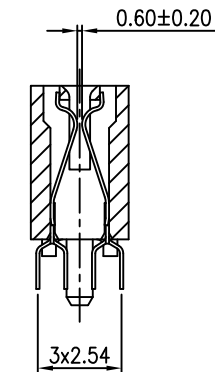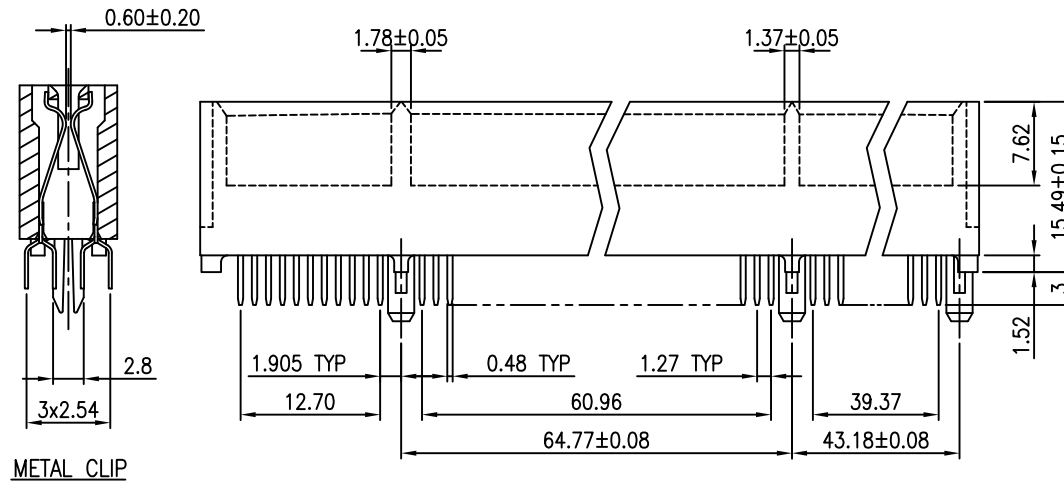

PLASTIC POST

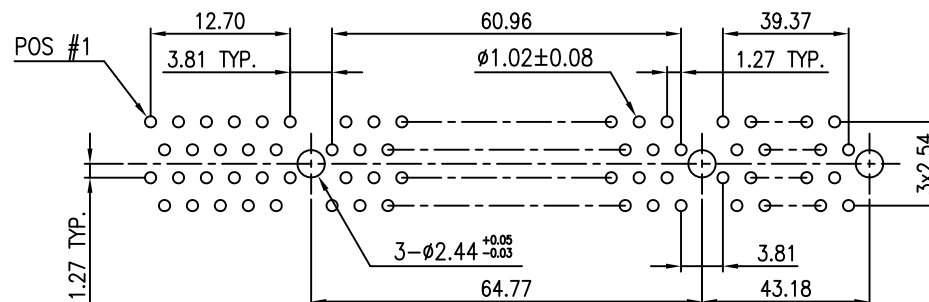

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

PCI-D-184V3-LF
SERIES | T | LEADFREE
3.3V
184 WAY
DIP 180°

DESCRIPTION: 64 BIT PCI CARDEDGE, 3.3V