

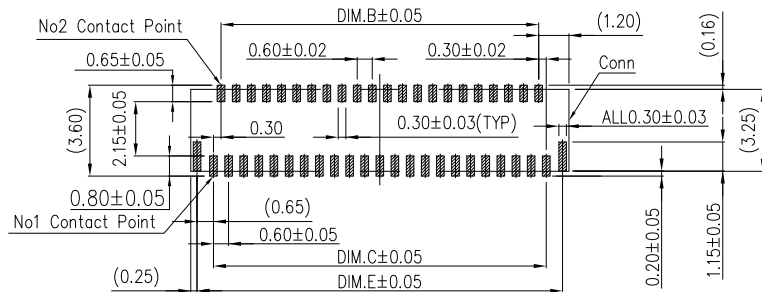

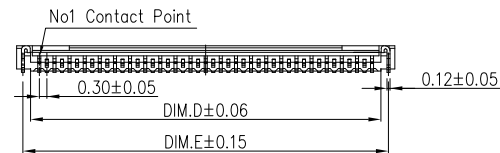


When Actuator Is Opened
Scale 2:1



FPC/FFC Insert Direction
Recommended P.C.B Layout

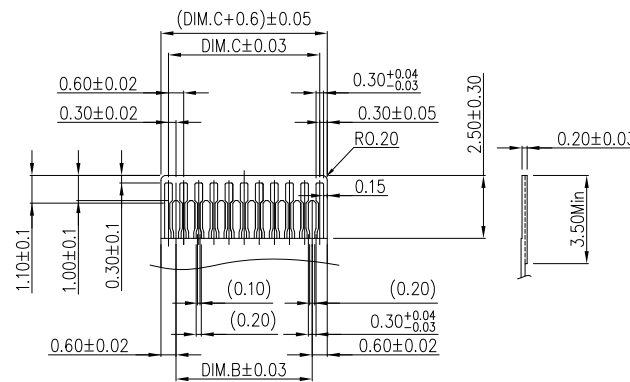

Applicable FPC

SPEC :

- 1.Housing:High-Temp Plastic,UL94-V
Color:Natural Or Black
- 2.Locker:High-Temp Plastic,UL94-V
Color:Black Or Natural
- 3.Contact:Phosphor Bronze
Initial:30m Ohms Max.
Voltage Rating:50V AC,DC
- 4.Solder Tab:BRASS
- 5.Temperature Rating:-55°C~+85°C
- 6.Dielectric Withstanding Voltage:500V AC/Min

● : 表示現有可提供PIN數

	PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
●	13	5.40	3.00	3.60	4.25	4.90
●	15	6.00	3.60	4.20	4.85	5.50
●	17	6.60	4.20	4.80	5.45	6.10
	19	7.20	4.80	5.40	6.05	6.70
●	21	7.80	5.40	6.00	6.65	7.30
●	23	8.40	6.00	6.60	7.25	7.90
●	25	9.00	6.60	7.20	7.85	8.50
●	27	9.60	7.20	7.80	8.45	9.10
●	29	10.20	7.80	8.40	9.05	9.70
●	31	10.80	8.40	9.00	9.65	10.30
●	33	11.40	9.00	9.60	10.25	10.90
●	35	12.00	9.60	10.20	10.85	11.50
	37	12.60	10.20	10.80	11.45	12.10
●	39	13.20	10.80	11.40	12.05	12.70
●	41	13.80	11.40	12.00	12.65	13.30
●	45	15.00	12.60	13.20	13.85	14.50
	49	16.20	13.80	14.40	15.05	15.70
●	51	16.80	14.40	15.00	15.65	16.30
	57	18.60	16.20	16.80	17.45	18.10
●	61	19.80	17.40	18.00	18.65	19.30
●	67	21.60	19.20	19.80	20.45	21.10
	71	22.80	20.40	21.00	21.65	22.30

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±



ORDER INFORMATION

FPT-WHB10-xx-LF

SERIES

LEADFREE

13~67WAY

HIGH 1.0mm

BOTTOM CONTACT

HINGED ZIF

90°SMT

DESCRIPTION: FPC 0.3PH 1.0H 掀蓋臥貼前插