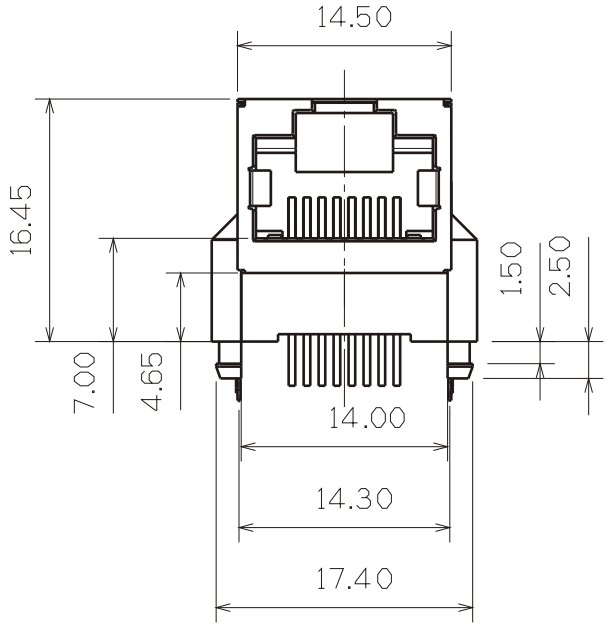

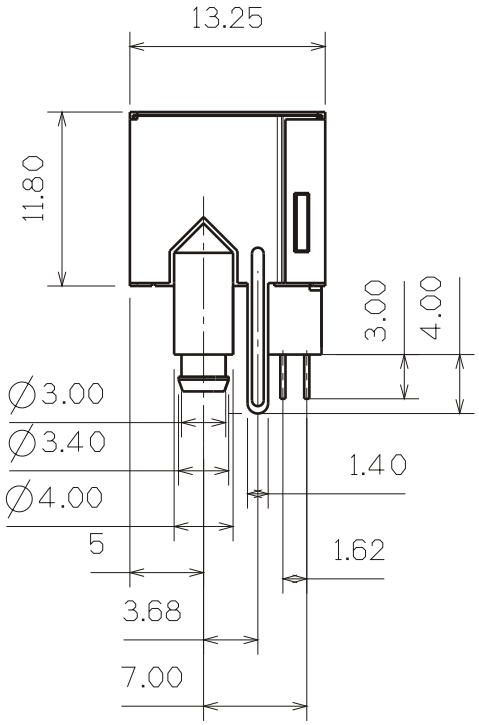

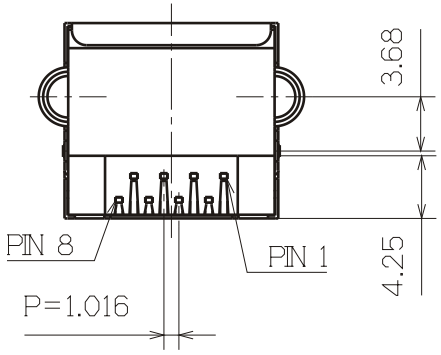

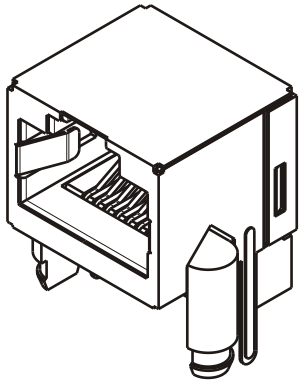

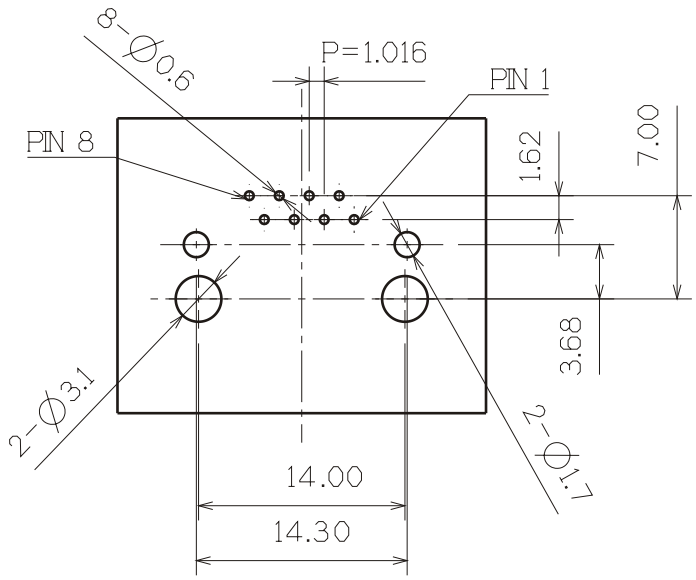

PCB LAYOUT(Top View)

MATERIAL AND FINSH

HOUSING : LCP POLYESTER UL-94V-0 MIXED GLASS FIBER.
STANDARD COLOR FIBER.
CONTACT : 0.35mm THICK PHOSPHOR BRONZE PLATED WITH NICKEL.
CONTACT PLATED : GOLD 15u".
SHIELD : 0.20mm THICK COPPER ALLOY PLATED WITH NICKEL.

ELECTRICAL:
1. CURRENT RATING : 1.5 AMP.
2. VOLTAGE RATING : 150 VAC.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MILLIOHMS MIN.
5. DIELECTRIC WITHSTANDING VOLTAGE : 1000 VAC, 1MIN.

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
DATE		.XX ±
SIZE A4	PPOJECTION	.XXX ±
		ANG ±



ORDER INFORMATION

MJF16U-KX15B36-0808-LF

- SERIES
- BLACK
- NON EAR
- 15u" GOLD
- REAR TAB 3.68mm
- 8P8C
- LEADFREE

DESCRIPTION: