

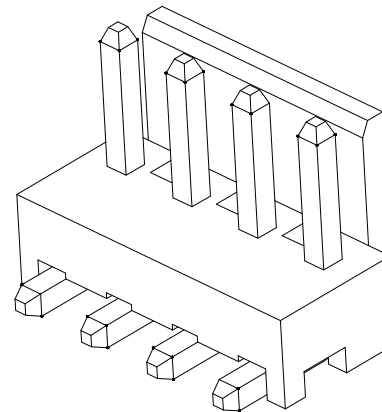
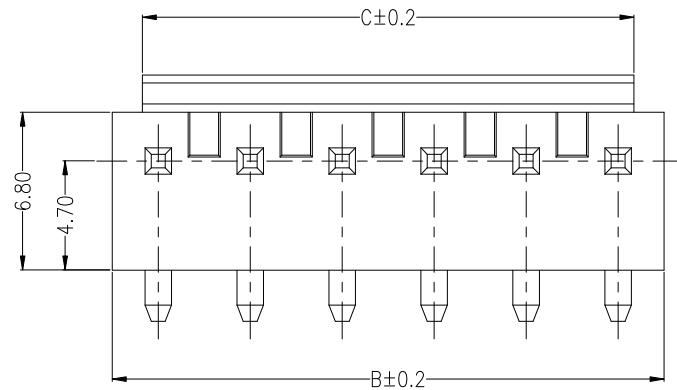
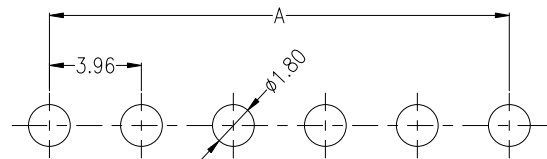


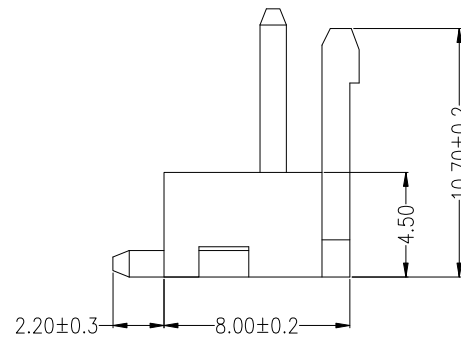

Specifications:

Contact resistance: $\leq 20\text{m}\Omega$
 Insulation resistance: $\geq 1000\text{M}\Omega$
 Rated voltage: 250V AC DC
 Rated current: 7.0A AC DC
 Withstand Voltage: 1000V AC/minute
 Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Housing: LCP UL94V-0, Natural
 Contacts: Brass /Sn

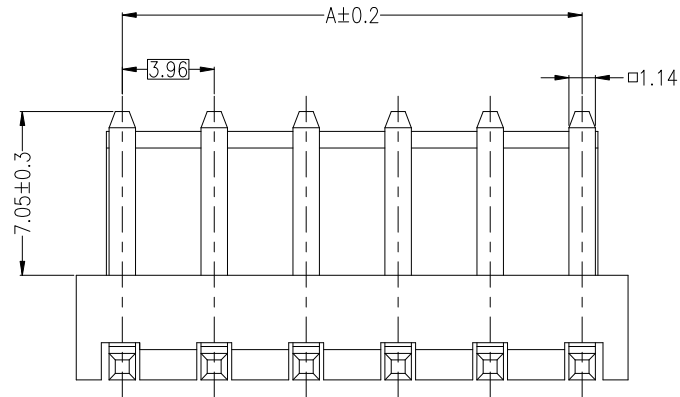

RECOMMENDED PCB LAYOUT(TOP VIEW)
 TOLERANCE: $\pm 0.05\text{mm}$

Circuits	Dimensions (mm)		
	A	B	C
02	3.96	7.92	5.32
03	7.92	11.88	9.28
04	11.88	15.84	13.24
05	15.84	19.80	17.20
06	19.80	23.76	21.16
07	23.76	27.72	25.12
08	27.72	31.68	29.08

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX $\pm$

ANG $\pm$


PPOJECTION




ORDER INFORMATION

VH-RR-xx-LF
 SERIES | REEL | LEADFREE
 02~08WAY
 DIP 90°


DESCRIPTION:

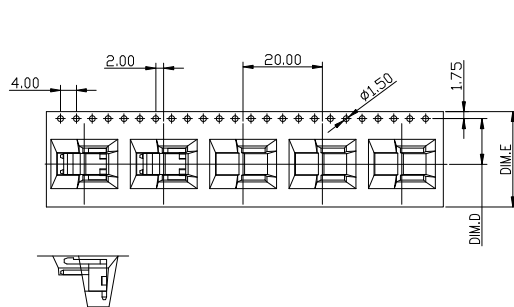



02~03 CONTACTS

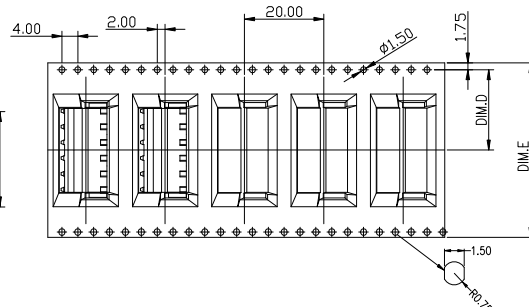

04~06 CONTACTS

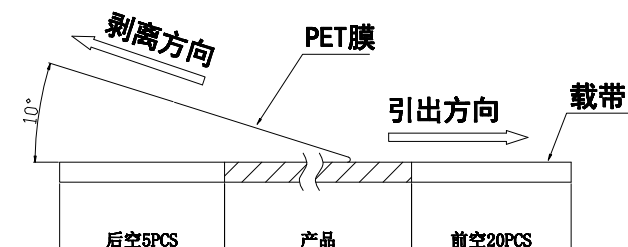

(PET膜剥离示意图)

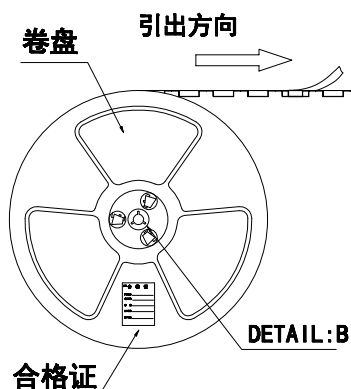


列表一


DETAIL:B

Circuits	DIM. D	DIM. E	Q'ty/Reel	Packing (Reel/Caton)
02~03PIN	11.5	24	250PCS	15/Reel
04PIN	14.25	32	250PCS	11/Reel
05~06PIN	20.2	44	250PCS	8/Reel

产品引出方向




装*盘(参考列表一)

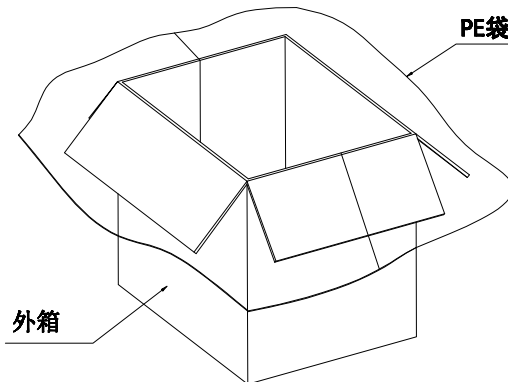

外箱

PE袋

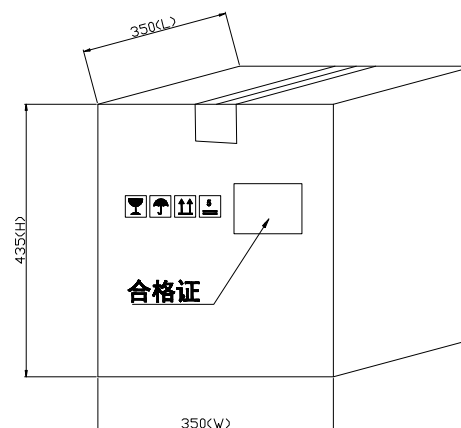

合格证

包装说明:

1. 把成品包入卷盘中, 每盘装250PCS, 卷盘上贴上合格证, 将装好产品的卷盘放进外箱中, 外箱内先套一个大PE袋, 外箱上贴贴上合格证。
2. 所有材料有害物质控制需符合RoHS标准。

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±



ORDER INFORMATION

VH-RR-xx-LF
SERIES REEL LEADFREE
02~08WAY
DIP 90°

DESCRIPTION: