


Specifications
 Current Rating:1.0Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:300VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature
 Thermoplastic, UL 94V-0 Nylon 6T(Halogen Free)
 or the equivalent material

Recommended P.C.Board
 Layout
 (Tolerance:±0.05)

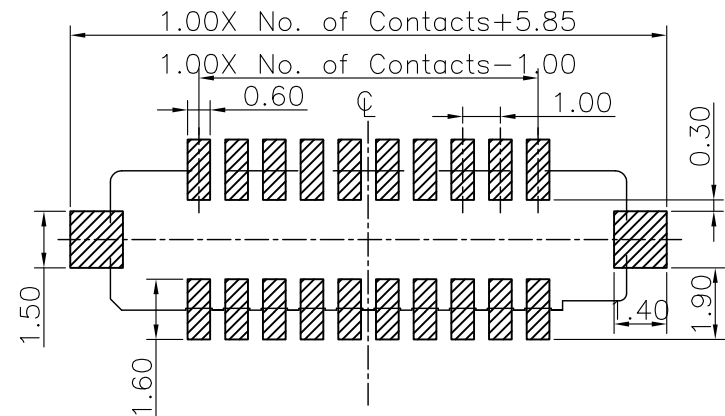

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm
 DATE

SCALE 1:1

SIZE A4

P PROJECTION

X. ± 0.30
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±



ORDER INFORMATION

NP1014-SVTC-xx-LF

SERIES | LEADFREE
 | 06-30WAY
 | CAP (MYIAR)
 | TIN
 | 180°SMT
 | FEMALE

DESCRIPTION: 1.00 PITCH FEMALE BOARD TO BOARD TYPE