
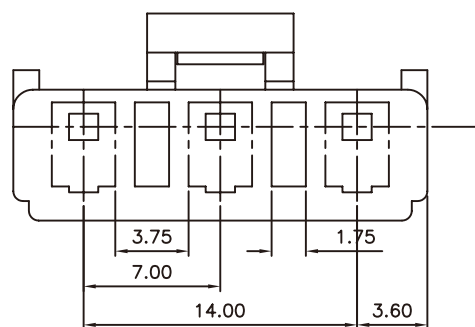
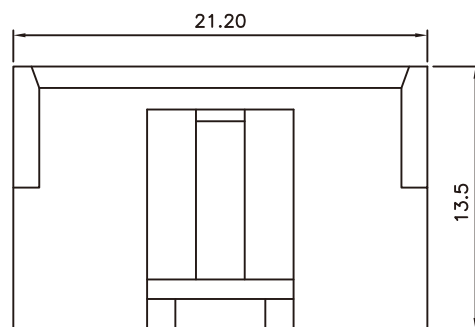


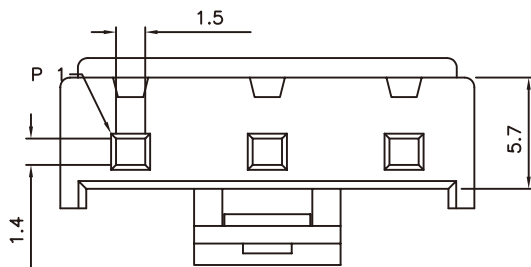

HOUSING

Poles: 3

Material: Nylon 66, UL94V-0

Q'ty: 500, 1000 pcs/bag

ELECTRICAL:

CURRENT RATING: 7.0A AC DC.

VOTAGE RATING: 250V AC DC.

TEMPERATURE RANGE: -25°C~+85°C.

CONTACT RESISTANCE: 20m Ohm Max.

INSULATION RESISTANCE: 1000 M Ohm Min.

WITHSTANDING VOTAGE: 1500V AC/MINUTE.

APPLICABLE WIRE: AWG #22 TO #18

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±


DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

VH70-H-03-LF

SERIES | T LEADFREE
03 WAY
HOUSING

DESCRIPTION: *PITCH 7.0 HOUSING*

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com