

Features:

- 2 ~ 6 circuits available
- Material: UL 94V-2 nylon

Specification:


- Current rating: (Used with #18 AWG)

Circuits	2 ~ 3	4 ~ 6
Ampere	9	8

- Voltage rating: 600V (R.M.S.)
- Insulation resistance: DC 500V 1000M Ω min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(Including temperature rise)

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C
2	4.2	9.6	15.0	4	12.6	18.0	23.4	6	21.0	26.4	31.8
3	8.4	13.8	19.2	5	16.8	22.2	27.6				

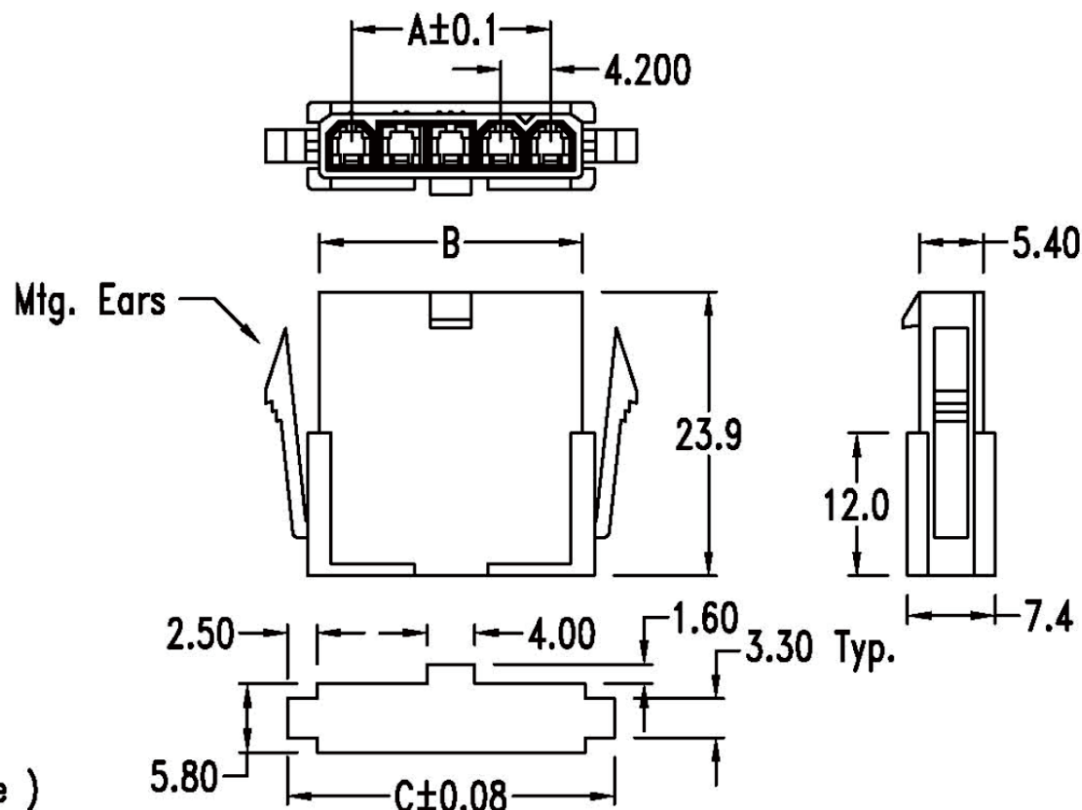

PANEL CUTOUT [Max. panel thickness: .079"(2.0mm)]

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

P PROJECTION

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

MF-PH-1Xxx-LF
SERIES | LEADFREE
1X02:02WAY
1X06:06WAY
HOUSING
MALE

DESCRIPTION: