



Pcs/1bag
1000

ML-PE-3X03

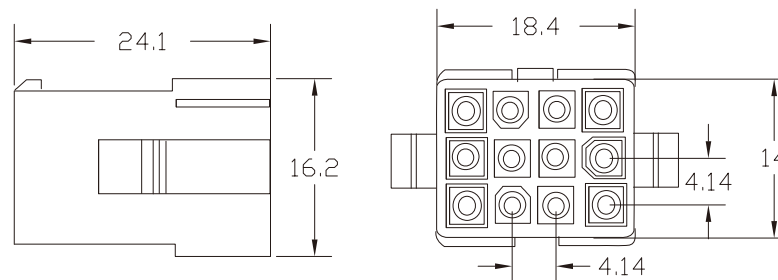

Pcs/1bag
500

ML-PE-3X04

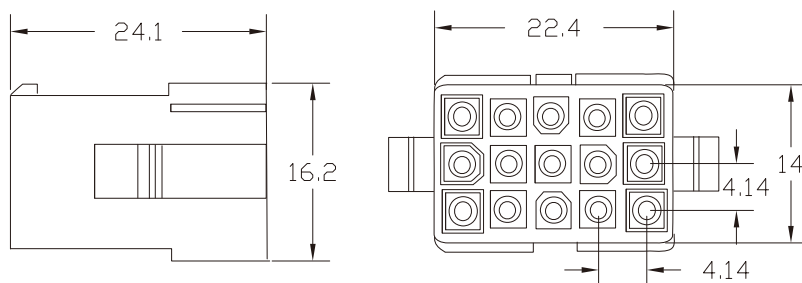

Pcs/1bag
500

ML-PE-3X05

SPECIFICATIONS

Voltage rating:300V AC,DC


Current rating:5A AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000MΩHM min

Temperature range:-25°C~+90°C

Material:UL94V-2 Nylon 66

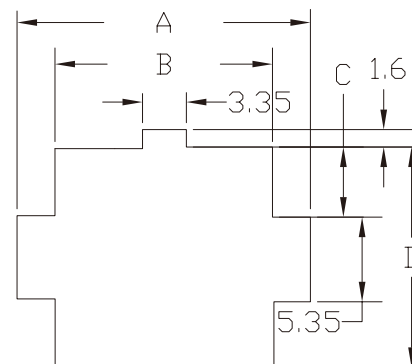

Number of Circuits	Dimensions			
	A	B	C	D
2	10.70	6.15	2.50	10.35
3	10.70	6.15	4.60	14.55
4	14.90	10.35	2.50	10.35
6	19.10	14.55	2.50	10.35
9	19.10	14.55	4.60	14.55
12	23.30	18.75	4.60	14.55
15	27.50	22.95	4.60	14.55

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

ML-PE-3Xxx-LF
SERIES | LEADFREE
3X03:09WAY
3X05:15WAY
EAR
MALE

DESCRIPTION: