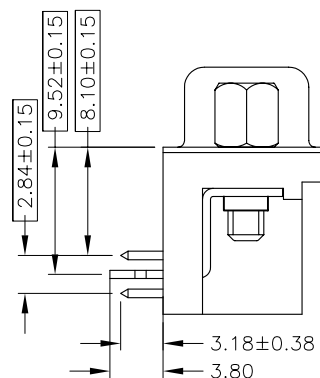
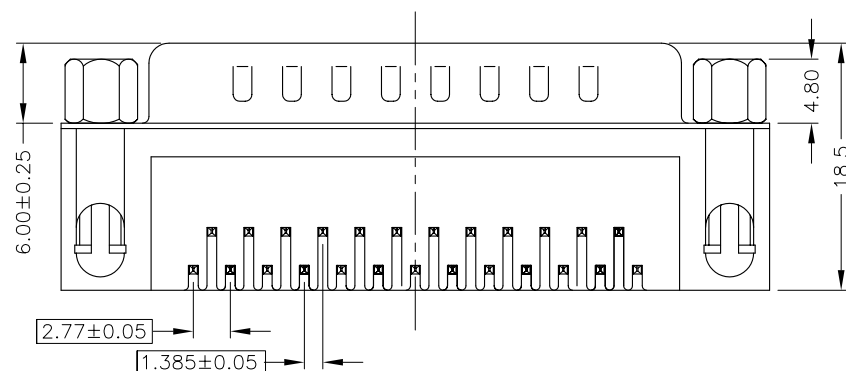
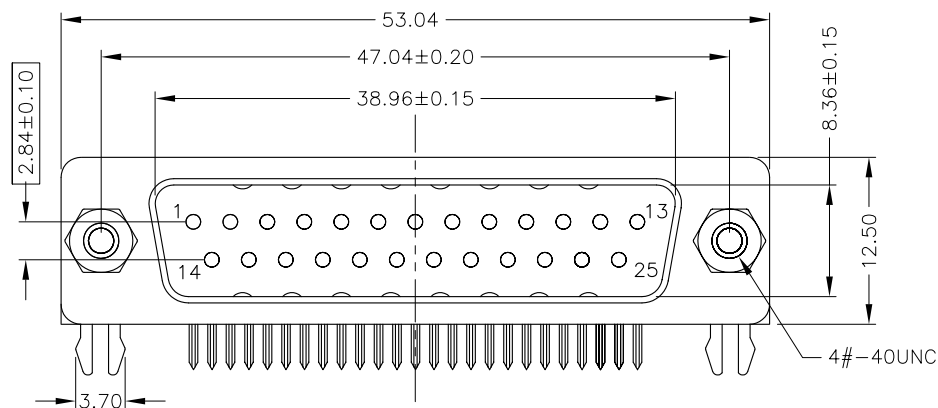


NOTES:

1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact: Brass
- 1.3 Contact Plating: Gold
- 1.4 Shell: Nickel Plated

2.SPECIFICATION

- 2.1 Current Rate: 1 Amps
- 2.2 Insulator Resistance:1000M Ω Min.
- 2.3 Dielectric Strength:500V AC Per minute
- 2.4 Operation Temperature:-55 $^{\circ}$ C to+105 $^{\circ}$ C
- 2.5 Contact Resistance:30m Ω max

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

DR-PG-25-LF
SERIES | LEADFREE
25 WAY
FULL GOLD
MALE

DESCRIPTION: