
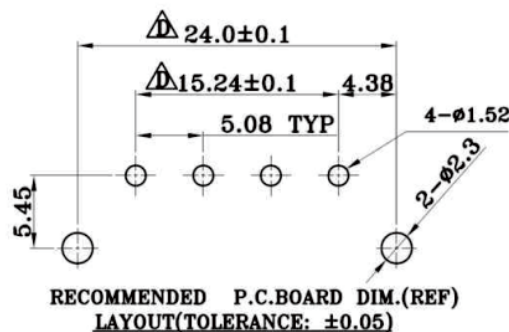
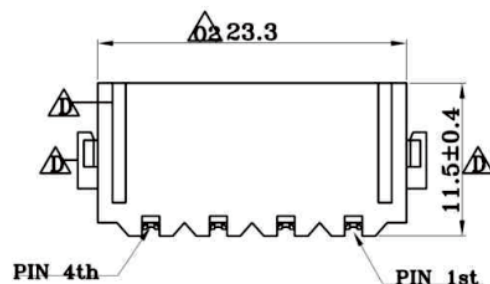
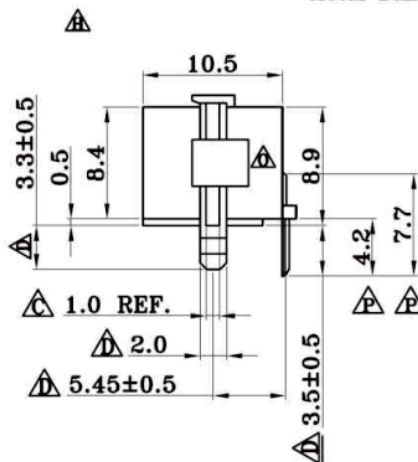
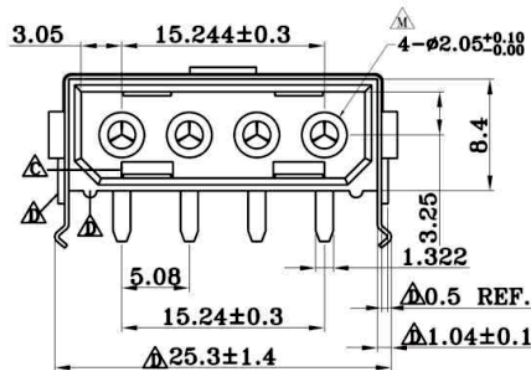


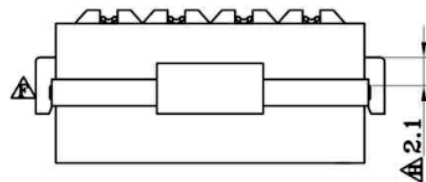

Material:


Housing: See Order Information.
Housing Color: See Order Information.
Terminal: Copper Alloy
Metal Band: Copper Alloy

Finish:

Terminal: See Order Information.
Metal Band: See Order Information.

Specification:

Contact Resistance: 10mΩ Max.
Current Rating: 5A AC/DC
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding Voltage: 1500V AC/Minute
Operation Temperature: -25° ~ +85°
Voltage Rating: 250V AC/Minute
Applicable Wire Range: AWE#18-#24
Applicable P.C.B Thickness: 0.8mm-1.6mm
Applicable P.C.B Hole Dia: ∅1.8mm±0.05

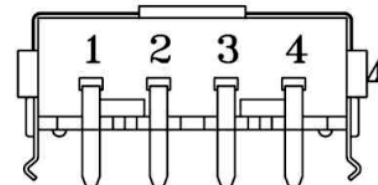

A VIEW

NOTES:

1. High temp. Process Statement:
230 degree C for 30 to 60 seconds,
and 260 degree C for 10 seconds.
2. This component and its homogeneous
subcomponents are RoHS compliant.
3. Dry plastic ball under temperature 150 degree
for 6 hours before.
4. Keep with water-resist bag and silica gel after
assembling .
5. Must use 100% new material.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DP-PRMxx-04-LF
SERIES | LEADFREE
04WAY
BK:BLACK
WH:WHITE
MALE | METAL
DIP 90°


DESCRIPTION:

PACKING DRAWING

1-1 如圖所示將1X4P POWER BASE CONNECTOR, R/A TYPE放入TRAY盤內,
依圖示方向放入.


備注: 1. 一個TRAY盤放置成品50PCS.

2. TRAY盤的尺寸為: 上蓋:175*161.5*14.2mm
下蓋:175*161.5*15.2mm.

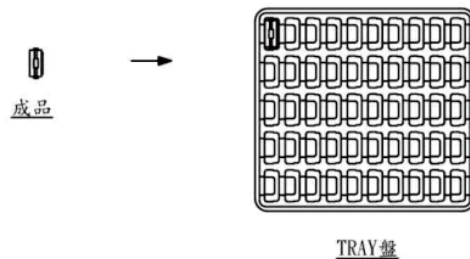

2-1 如圖所示: 將裝好成品之TRAY盤放置3疊, 每疊10層.


備注: 每TRAY盤需放置一包1.0g干燥劑.

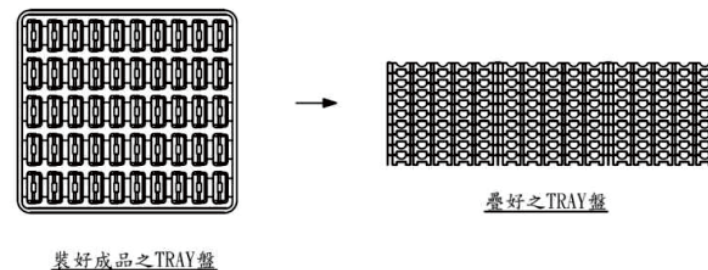

3-1 將層疊放置好的TARY盤, 裝入紙箱.

備注: 1. 包裝箱的尺寸為: 512*200*165mm.

2. 一個包裝箱裝成品1500PCS.

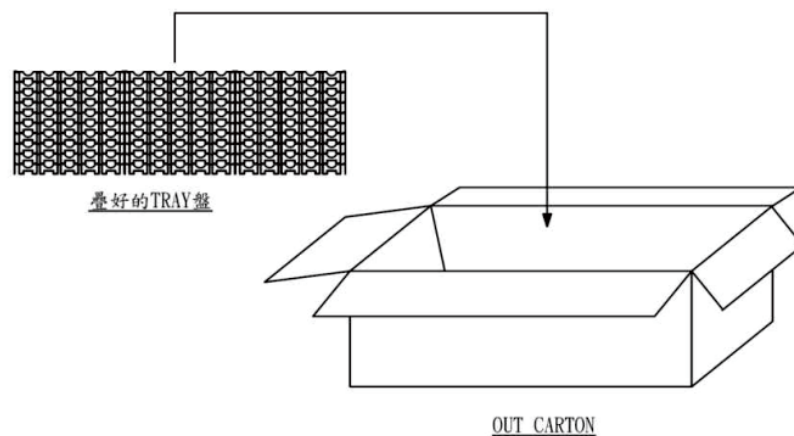

4-1 紙箱內側四角需放角紙板.


4-2 紙箱材質為K=K.

4-3 開口處以透明膠帶貼合.

4-4 若有未裝滿之零數箱, 必須以緩沖材塞滿.

備注: 1. 透明膠帶要粘牢;

2. 外箱上所貼標籤規格視客戶而定.

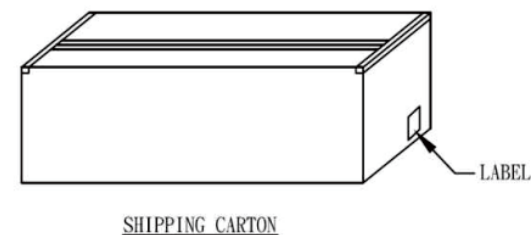

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

DP-PRMxx-04-LF
SERIES | 04WAY | LEADFREE
MALE | METAL | BK:BLACK | WH:WHITE
DIP 90°

DESCRIPTION: