

SPECIFICATIONS

Voltage rating: 300V AC,DC







Current rating: 12A,AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000M OHM min

Temperature range: -25°C~+85°C

Material:UL94V-2 nylon 66

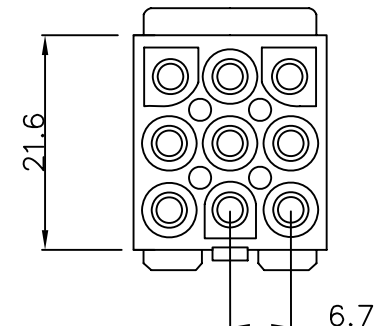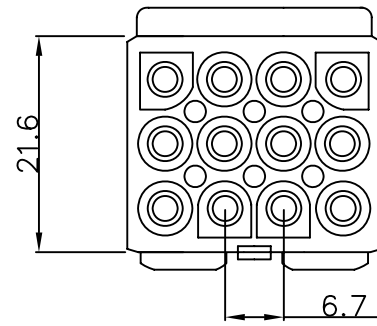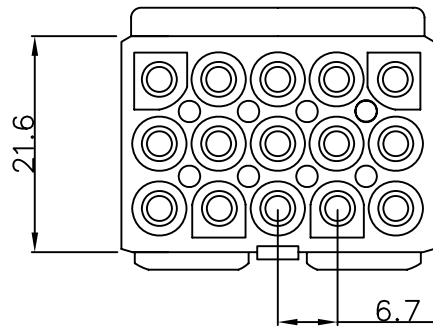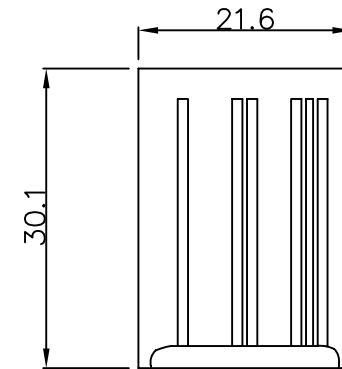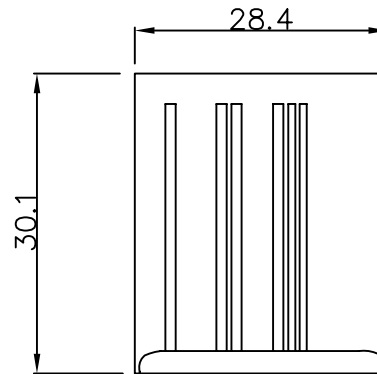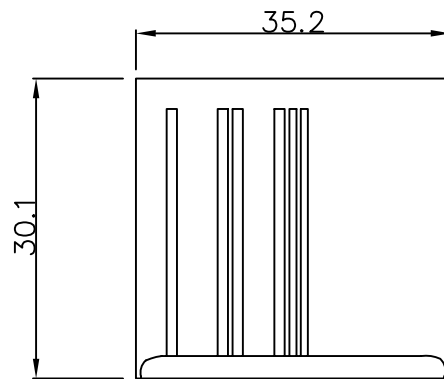

PWL-P-3X05

PWL-P-3X04

PWL-P-3X03

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

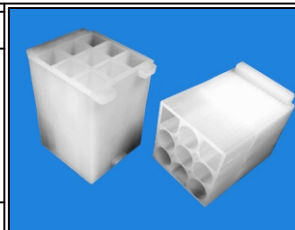

ORDER INFORMATION

PWL-P-3Xxx-LF
SERIES | LEADFREE
3X03:09 WAY
3X05:15 WAY
MALE HOUSING

DESCRIPTION: