


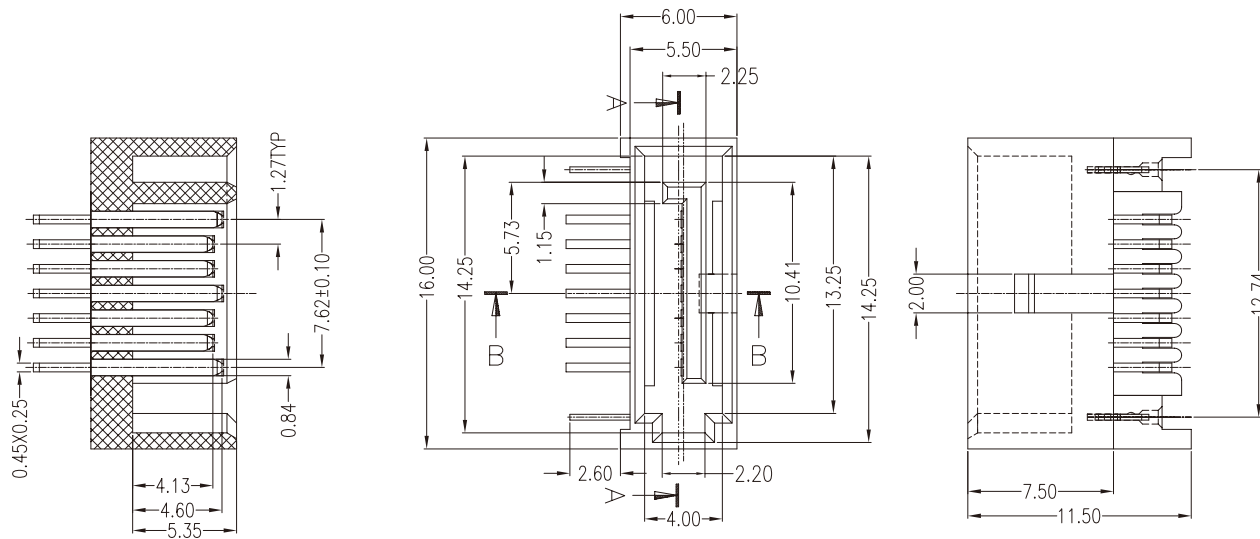

SECT A-A

P.C.B. Layout

SECT B-B

NOTES

*Material

Housing: LCP, UL 94V-0 Rated, Color:Black.

Contact: Brass

Plating: Gold Plating Over Nickel on Contact Area; Tin Plating on Solder Tail.

*Electrical Specification

Operation Voltage: 100 VAC Max.

Current Rating: 1.5 Ampere Per Contact.

Contact Resistance: 30 Milliohms Max.

Insulation Resistance: 1000 Megohms Min.

Dielectric Withstanding Voltage: 500 VAC.

*Environmental

Operating Temperature: -55°C to +125°C

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±


DATE

.XXX, ±

ANG, ±

SIZE A4

PPOJECTION



ORDER INFORMATION

SATA-PRAC60-07-LF
SERIES MALE 07 WAY HIGH 6.0mm C TYPE UPPER CONTACT LEADFREE
DIP 90°

DESCRIPTION: Serial ATA 7 Pins DIP 90° Shield Type Male

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com