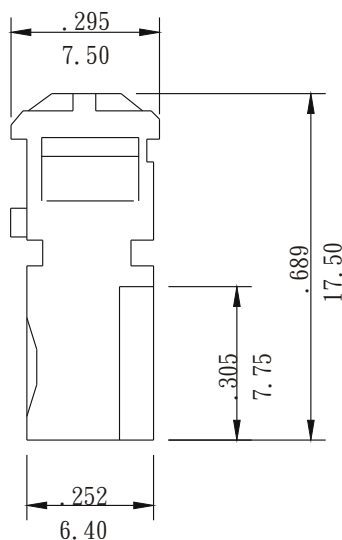
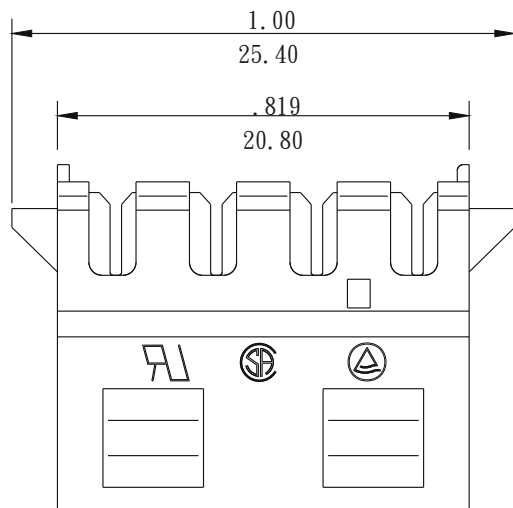
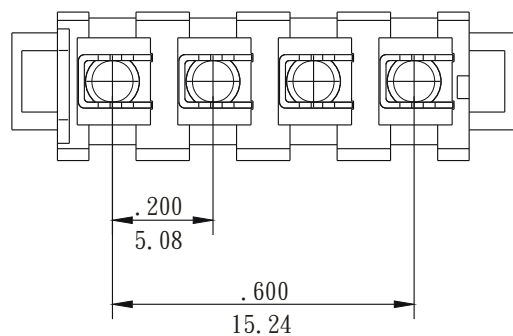


Female Connector

- * Material : Nylon UL 94V-2
- * Contact : Tin-plated phosphor bronze
- * Current rating : 4.5A, AC/DC
- * Voltage rating : 250V, AC/DC
- * Insulation O.D. : .095" (2.41mm) max.
- * Applicable wire AWG#22- #18
- * 4 circuits

Series Covers

- * Color : natural

inch
mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

DP-STx-04-LF
SERIES T LEADFREE
FEMALE 04WAY
L:L COVER
C:C COVER
IDT

DESCRIPTION: Disk Drive Power Con nection System