
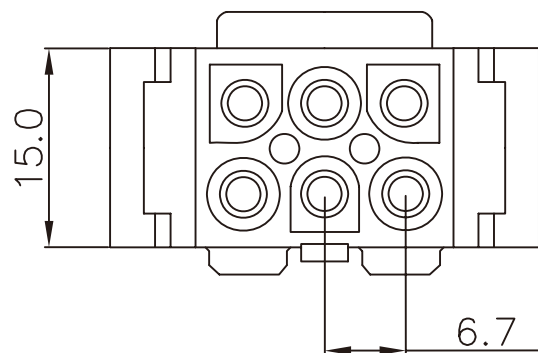


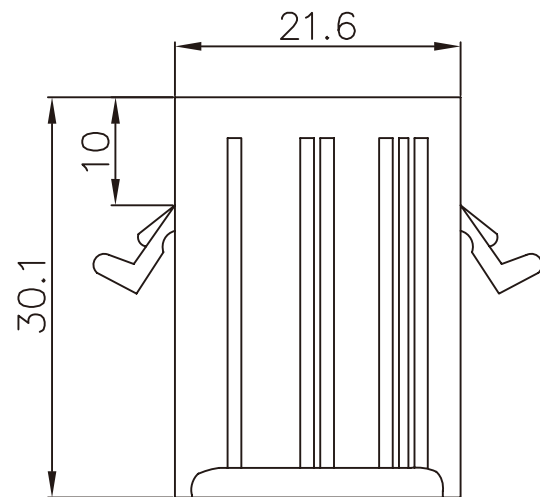

PWL-PE-2X03

SPECIFICATIONS

Voltage rating: 300V AC,DC

Current rating: 12A,AC,DC

Withstanding voltage: 1500V AC/minute

Insulation resistance: 1000M OHM min

Temperature range: -25°C~+85°C

Material: UL94V-2 nylon 66

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±


.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION



ORDER INFORMATION

PWL-PE-2X03-LF
SERIES | 06 WAY | LEADFREE
EAR
MALE

DESCRIPTION: