

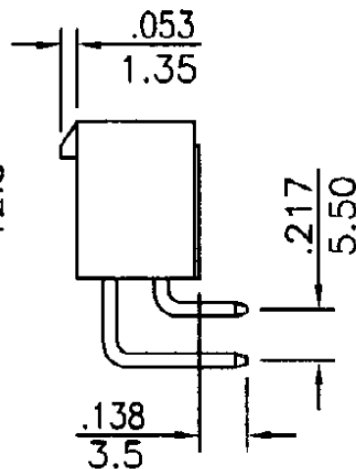
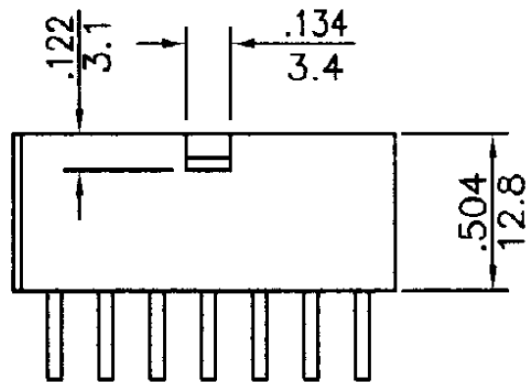


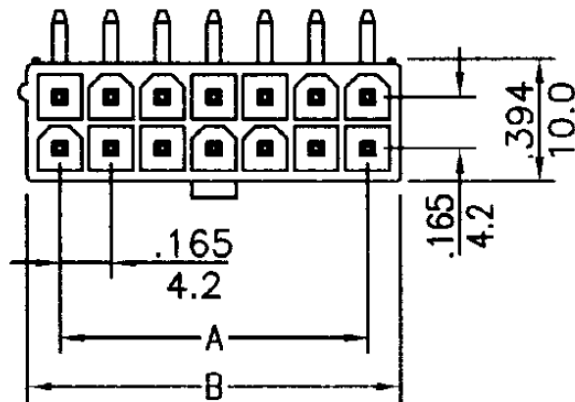

- * Poles:2-24
- * Material:Insulator:NYLON66 UL94V-2
- * Contact:1.14mm(.045") square pin,brass,tin plated

Specifications

- * Current rating: 8A AC, DC
- * Voltage rating: 500V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000M Ω min.
- * Withstand voltage: 1500V AC/minute
- * Applicable PC board thickness: .063" (1.6mm)

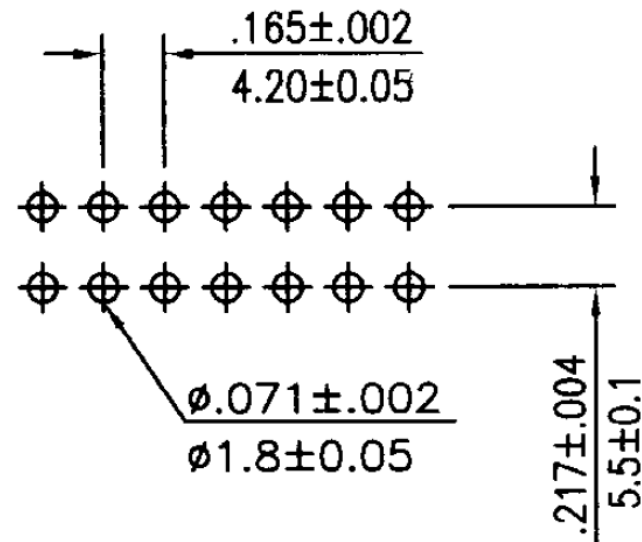

P.C. Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MF-PRX-2Xxx-LF
SERIES
LEADFREE
2X01:02WAY
2X12:24WAY
NON POST
DIP 90°
MALE

DESCRIPTION: