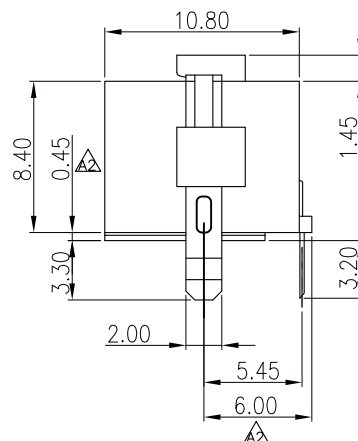
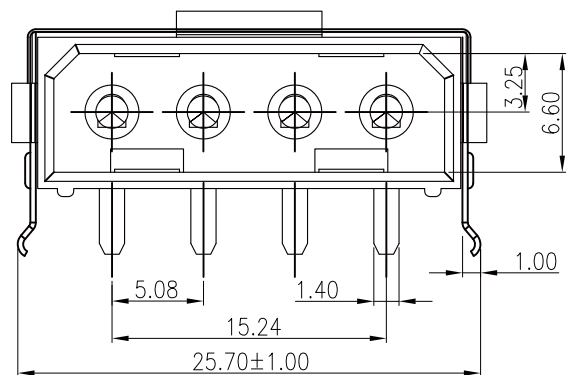
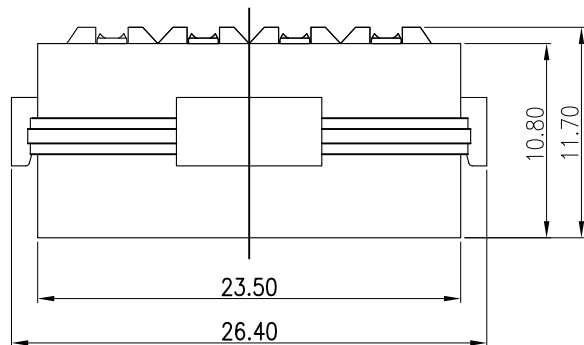


RECOMMEND P.C.B. LAYOUT
PCB TOLERANCE:±0.05

NOTES:

1. MATERIALS

HOUSING: (SEE TABLE), UL94V-0, COLOR: (SEE TABLE).

CONTACTS: BRASS.

SHELL: BRASS.

2. FINISH:

CONTACTS: 2.54μm [100μ"] MIN. BRIGHT-TIN OVER

1.27μm [50μ"] MIN. NICKEL PLATED.

SHELL: 2.54μm [100μ"] MIN. BRIGHT-TIN ON SOLDER TAILS,

1.27μm [50μ"] MIN. NICKEL OVER ALL.

HALOGEN FREE PA66 +30GF	WHITE
HOUSING MATERIAL	HOUSING COLOR

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DP-PLMWH-04-HF
SERIES | WHITE | METAL | LEFT ANGLE | MALE
04WAY | HALOGEN FREE

DESCRIPTION: POWER CONNECTOR, 4 POSITION PLUG, RIGHT ANGLE, DIP.