
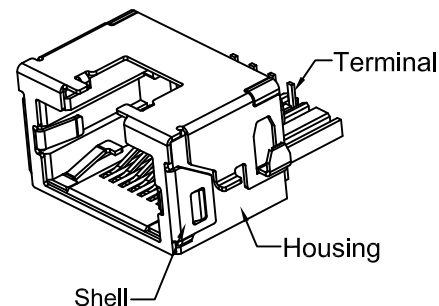
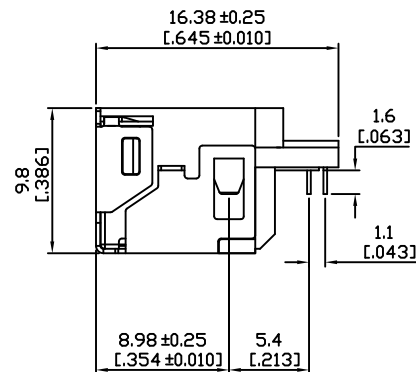


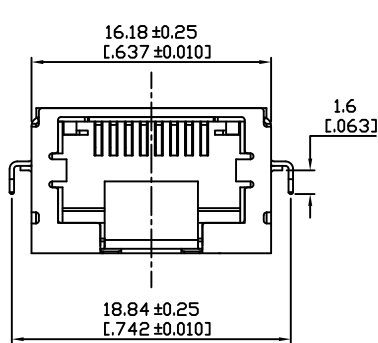



Electrical Characteristics :

Insulation Resistance : 500MΩ Min.
Contact Resistance : 50mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:

Housing: High-Thermoplastic UL94V-0
Contact : Selective Gold Plating
Terminal: 0.25mm Thickness Copper Alloy
Plated With Gold And Tin In Solder Area.
Shell: Alloy ,Nickel Plating

Storage & Operating Temperature: -40°C~85°C

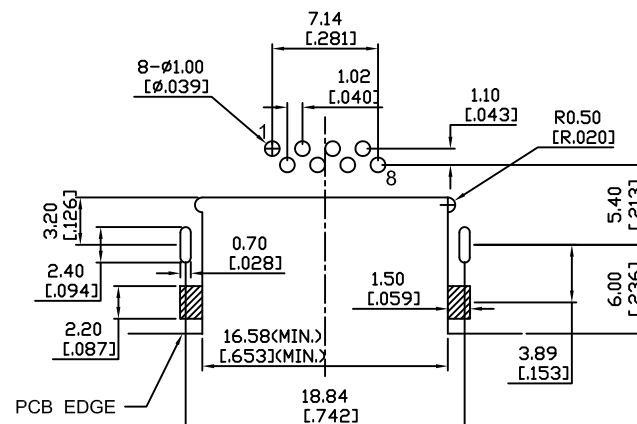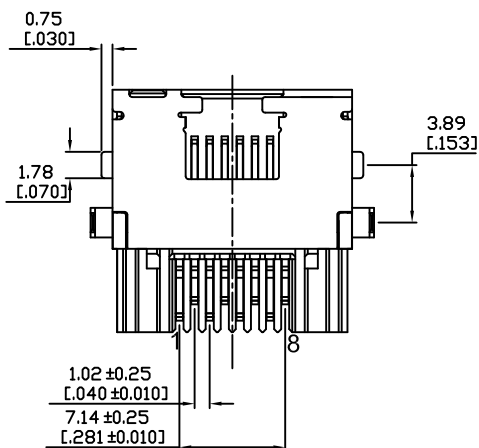

RECOMMENDED PCB LAYOUT
TOP VIEW
PCB THICKNESS: 1.60±0.05mm
TOLERANCE: ±0.05mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.075
ANG ±

照片框

ORDER INFORMATION

MJF04-KX06EM2-0808-LF

SERIES
BLACK
8P8C
EAR
06u" GOLD
NON EAR
LEADFREE
METAL FOOT

DESCRIPTION: RJ45,Shielded,Receptacle, Horizontal,Single Port,Tht