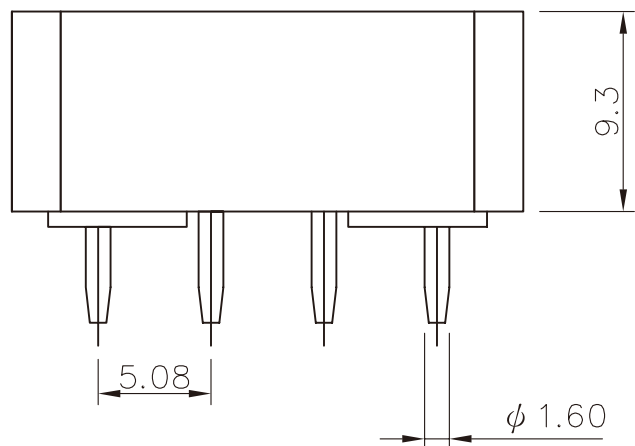
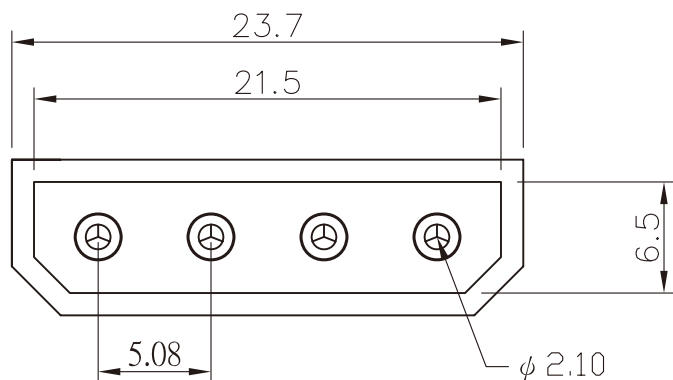


RECOMMENDED PCB LAYOUT

- * Material : Nylon66, UL 94V-2
- * Current rating : 5A, AC/DC
- * Voltage rating : 250V AC/DC
- * Finish : Tin-plated
- * Operating Temp : -25°C ~ +85°C
- * Contact resistance : 10mΩ Max.
- * Insulation resistance : 1000MΩ Min.
- * Withstanding Voltage : 1500V AC/minute

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

DP-PDX-04-LF
SERIES | LEADFREE
04WAY
NON RIB
DIP 180°
MALE

DESCRIPTION: 5.08mm Wire-to-Board Header DIP 180° Type