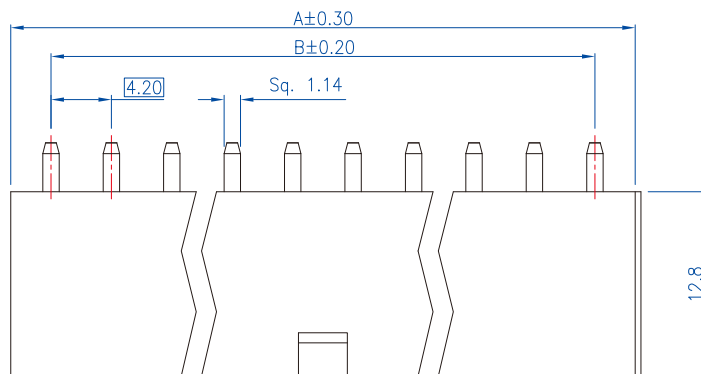


PCB Layout
(Top View)

Material and Finish

1. Housing: Nylon 66 (UL94V-2), Transparent.
2. Terminal: Brass, Tin Plating.

Electrical Characteristics

1. Current Rating: 7.0 Amp. Max..
2. Dielectric Withstand Voltage:
1000V AC RMS for 60Seconds.
3. Insulation Resistance:
1000M Ohms Min. at 1000V DC.

Mechanical Characteristics

1. Operating Temperature: -25°C ~ +85°C

Order Information	Dimensions		
	Pos.	A	B
MF-PDX4-2X01	02	5.70	
MF-PDX4-2X02	04	9.90	4.20
MF-PDX4-2X03	06	14.10	8.40
MF-PDX4-2X04	08	18.30	12.60
MF-PDX4-2X05	10	22.50	16.80
MF-PDX4-2X06	12	26.70	21.00
MF-PDX4-2X07	14	30.90	25.20
MF-PDX4-2X08	16	35.10	29.40
MF-PDX4-2X09	18	39.30	33.60
MF-PDX4-2X10	20	43.50	37.80
MF-PDX4-2X11	22	47.70	42.00
MF-PDX4-2X12	24	51.90	46.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MF-PDX4-2Xxx-LF
SERIES LEADFREE
2X01:02WAY
2X12:24WAY
ROW PITCH 4.2mm
MALE NON POST
DIP 180°

DESCRIPTION: 4.20mm Power Connector
Mini-Fit, PCB Mount Vertical Type without Post (Sq. Pin 1.14mm)