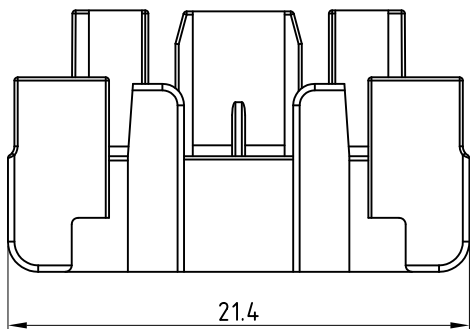
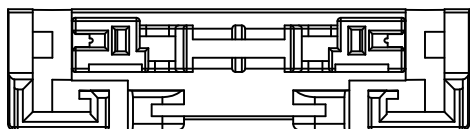


Specification

Pitch Between Poles: 13.00mm

Current Rating: 1A AC/DC

Voltage Rating: 3,000V AC/DC

Contact Resistance: 10mΩ MAX.

Withstand Voltage: 5,000V AC/Minute

Insulation Resistance: 1,000MΩ MIN.

Temperature Range: -25°C To +85°C

Features

Available Number of Circuits: 02

Material: P.B.T UL 94V-0

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±


DATE

.XXX, ±

SIZE A4

PPOJECTION

ANG, ±



ORDER INFORMATION

BD-H-02-LF
 SERIES | LEADFREE
 | 02 WAY
 HOUSING

DESCRIPTION: 13.0mm PITCH WIRE TO BOARD CONNECTOR

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com