

SPECIFICATIONS

Voltage rating:300V AC,DC






Current rating:12A,AC,DC

Withstanding voltage:1500V AC/minute


Insulation resistance:1000M Ω HM min

Temperature range:-25°C~+85°C


Material:UL94V-2 nylon 66

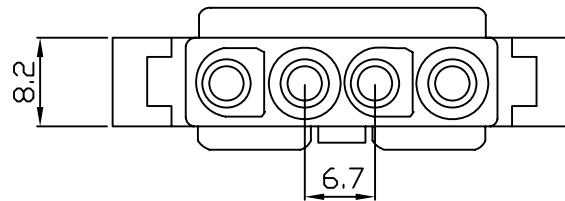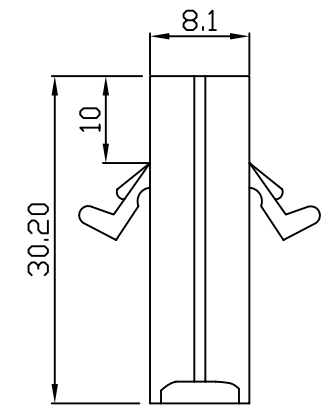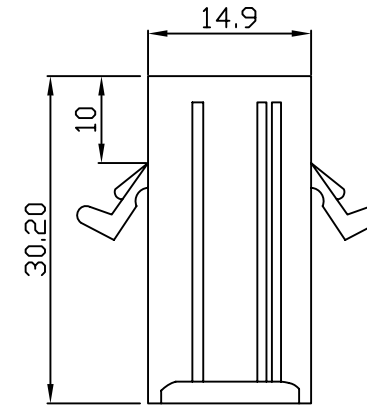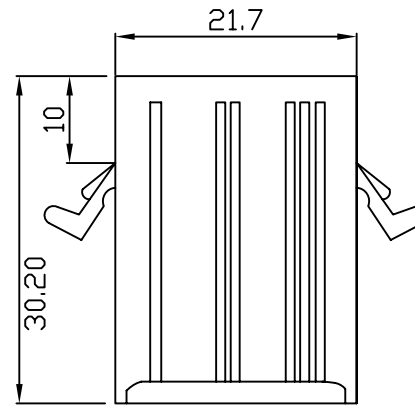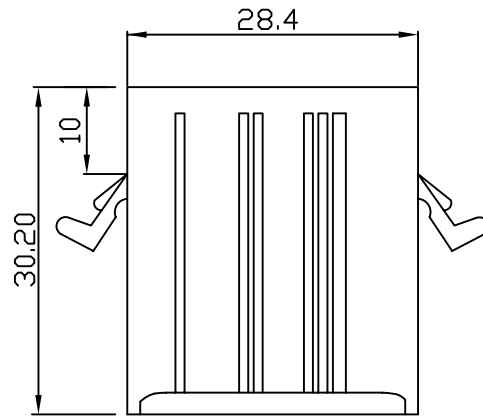


PWL-PE-1X04

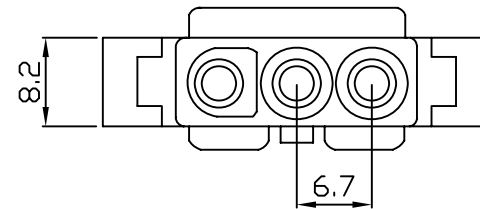

PWL-PE-1X03

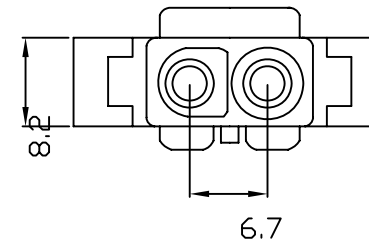

PWL-PE-1X02



PWL-PE-1X01

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

PWL-PE-1Xxx-LF
SERIES | LEADFREE
1X01:01 WAY
1X04:04 WAY
EAR
MALE HOUSING

DESCRIPTION: