


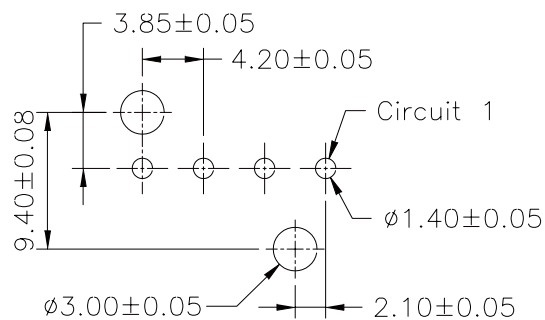
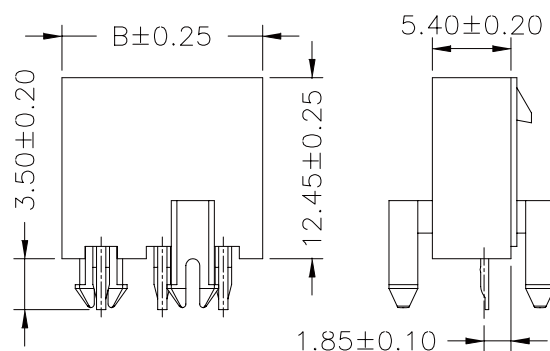
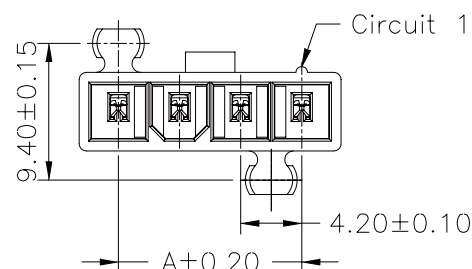


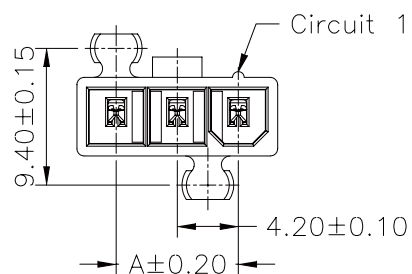

P.C.B. LAYOUT

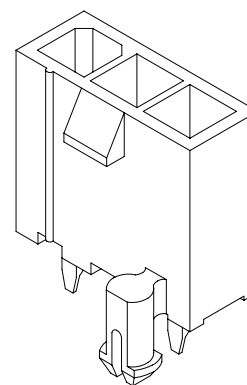

3P

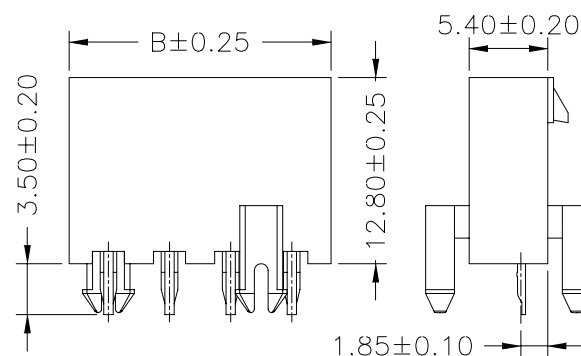

4P,5P

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 66,UL94V-2

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MF-PDP-1X03	8.40	13.80
MF-PDP-1X04	12.60	18.00
MF-PDP-1X05	16.80	22.20

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION



ORDER INFORMATION

MF-PDP-1Xxx-LF
SERIES | LEADFREE
1X03:03WAY
1X05:05WAY
POST
DIP 180°
MALE

DESCRIPTION: 4.20mm PITCH 180° WAFER WITH FOOT, SINGLE ROW, MINI-FIT