


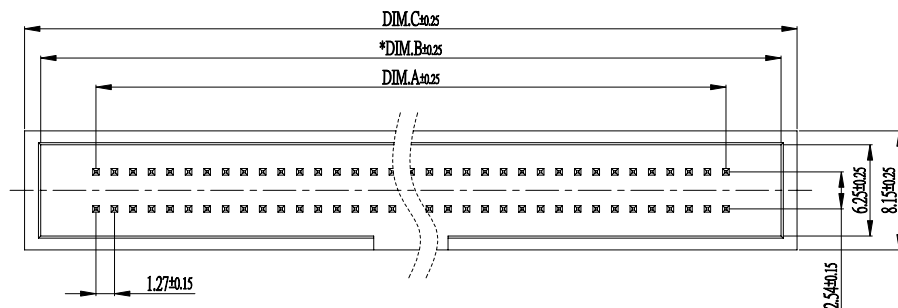

Material :

Insulator : PA-6T (UL94V-0);

Contact : Phosphor Bronze or Brass;

Contact Plated : Gold or Tin over Nickel.

Electrical Characteristics:

Current Rating : 1 Amp;

Withstanding Voltage : AC 500V r.m.s. ;

Insulation Resistance : 1000 Megohms Minimum at DC 500V;




Operating Temperature : -44 °C~105 °C.

備注:

1."*"標記為重點檢驗尺寸;加括號尺寸為參考尺;


2.未標示公差之尺寸參考公差表;

3.所有成品插板針腳100%過孔規。

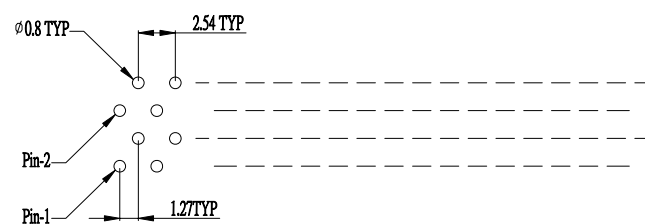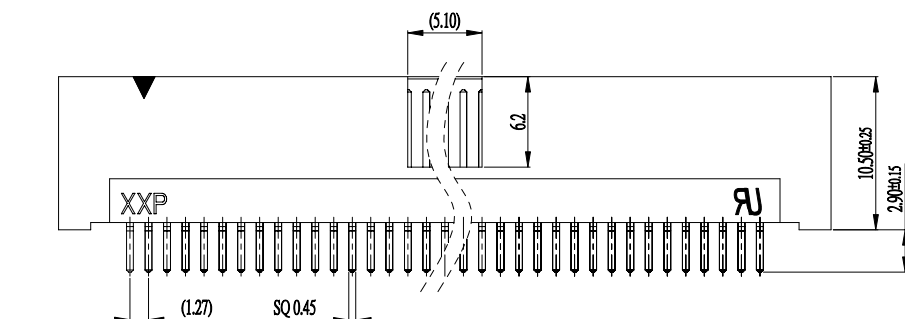

10P/26P/30P/34P/50P/70P Recommended P.C.B Hole Layout

單數pin

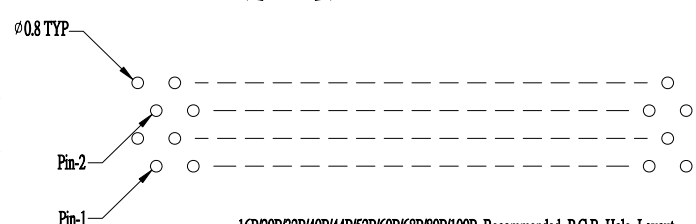

16P/20P/32P/40P/44P/52P/60P/68P/80P/100P Recommended P.C.B Hole Layout

雙數pin

No. of contacts	Dimension		
	DIM.A	DIM.B	DIM.C
10 Pin	5.08	12.65	14.85
16 Pin	8.89	16.46	18.66
20 Pin	11.43	19.00	21.20
26 Pin	15.24	22.81	25.01
30 Pin	17.78	25.35	27.55
32 Pin	19.05	26.62	28.82
34 Pin	20.32	27.89	30.09
40Pin	24.13	31.70	33.90
44 Pin	26.67	34.24	36.44
50Pin	30.48	38.05	40.25
52 Pin	31.75	39.32	41.52
60 Pin	36.83	44.40	46.60
68 Pin	41.91	49.48	51.68
70 Pin	43.18	50.75	52.95
80 Pin	49.53	57.10	59.30
100 Pin	62.23	69.80	72.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

HB-D4-xxx-LF
SERIES LEADFREE
010~100 WAY
4 ROW
DIP 180°

DESCRIPTION: