
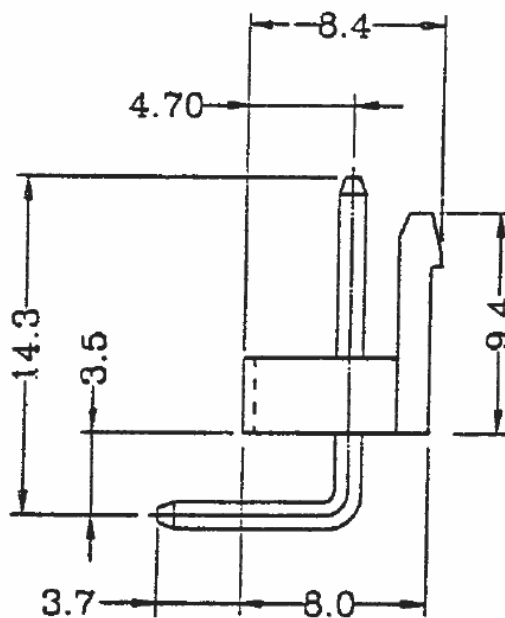


Material: Insulator: Nylon 66 UL 94V-0  
 Contact: 1.14mm Tin Plated Square Pin  
 D: Void 2nd Pin  
 Unit quantity: 1000 Pcs/Bag

### P.C.B. LAYOUT

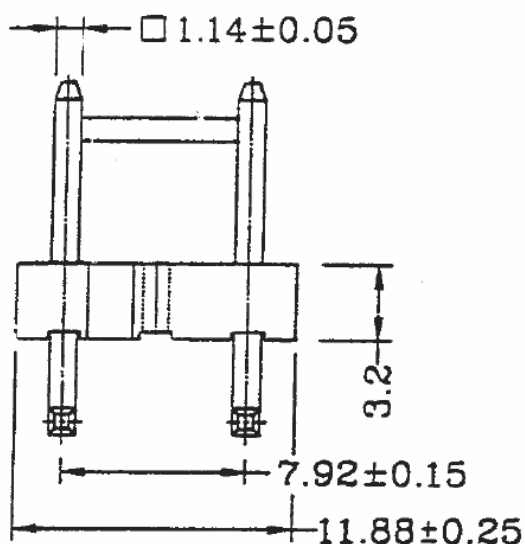

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**


DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1:1  
 DATE

TOLERANCES ARE

X.±  
 .X±  
 .XX±  
 .XXX±  
 ANG ±

SIZE A4

PPOJECTION



**ORDER INFORMATION**

VA-R-02-LF  
 SERIES | LEADFREE  
 02WAY  
 DIP 90°

DESCRIPTION: