
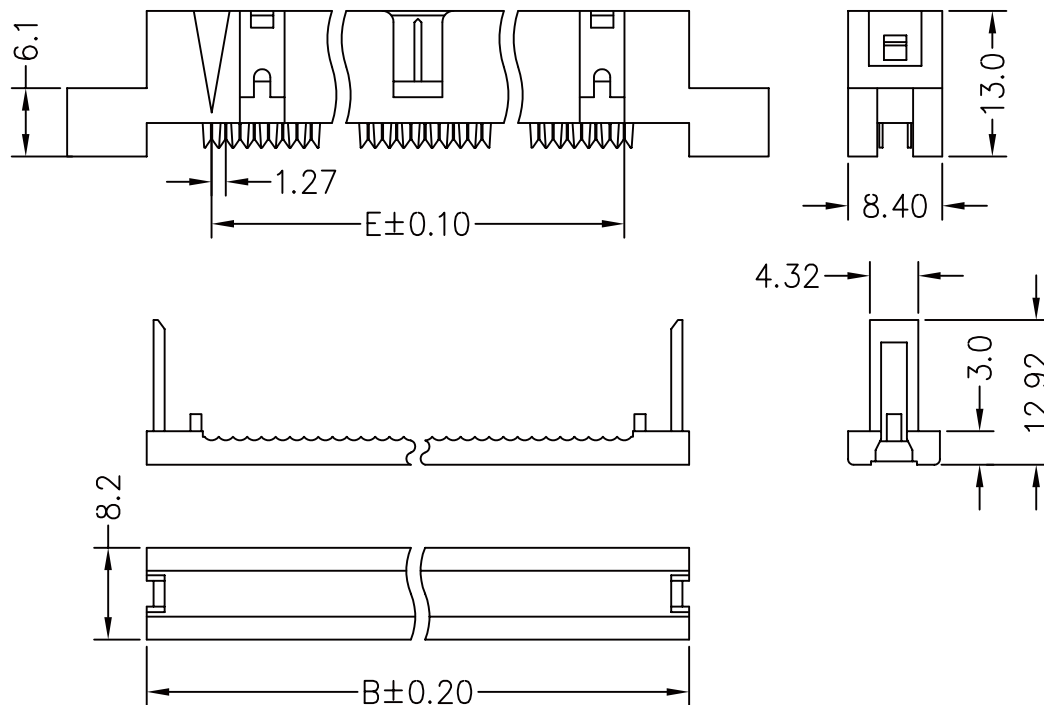


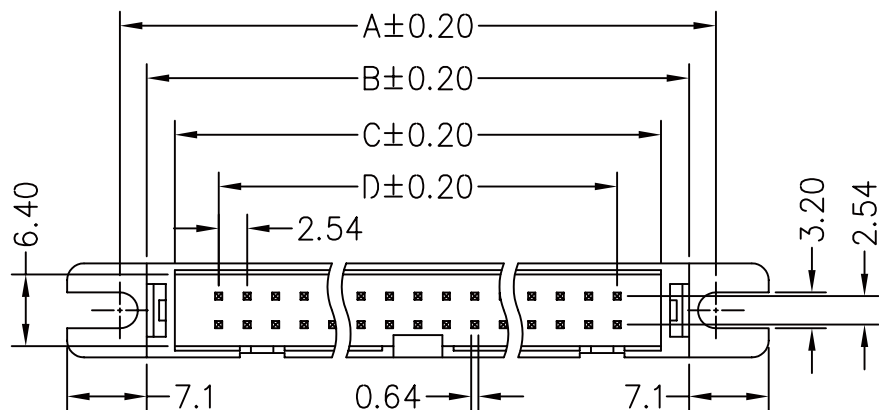

Material:

1. Insulator: PBT+30% Glass Fiber(Meet UL94V-0).
2. Contact: Copper Alloy.
3. Contact Plated: Gold or Tin over Nickel Plated.

Specification:

1. Current Rating: 1 Amp.
2. Withstanding Voltage: AC 500V for 1 Minute.
3. Insulation Resistance: 1000MΩ Min. at DC 500V.
4. Contact Resistance: 15mΩ Max..
5. Operating Temperature: -40°C~+105°C.

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E
10	27.80	23.00	18.00	10.16	11.43
14	32.88	28.08	23.08	15.24	16.51
16	35.42	60.62	25.62	17.78	19.05
20	40.50	35.70	30.70	22.86	24.13
24	45.58	40.78	35.78	27.94	29.21
26	48.12	43.32	38.32	30.48	31.75
30	53.20	48.40	43.40	35.56	36.83
34	58.28	53.48	48.48	40.64	41.91
40	65.90	61.10	56.10	48.26	49.53
50	78.60	73.80	68.80	60.96	62.23
60	91.30	86.50	81.50	73.66	74.93
64	96.38	91.58	86.58	78.74	80.01

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

B-C2HE-xx-LF
SERIES | LEADFREE
10~64WAY
HALF EAR
TWO TYPE

DESCRIPTION: 2.54mm IDC Box Header With Ear Type