

Material:

* Insulation:

High temperature plastic UL 94V-0




* Contact: Phosphor Bronze

* Pick & Place Pad:

Nylon 6T UL 94V-0 Color Nature

$\text{DIM.A} = 1.27 \times \text{No. of Spaces}$

$\text{DIM.B} = \text{DIM.A} + 3.3$

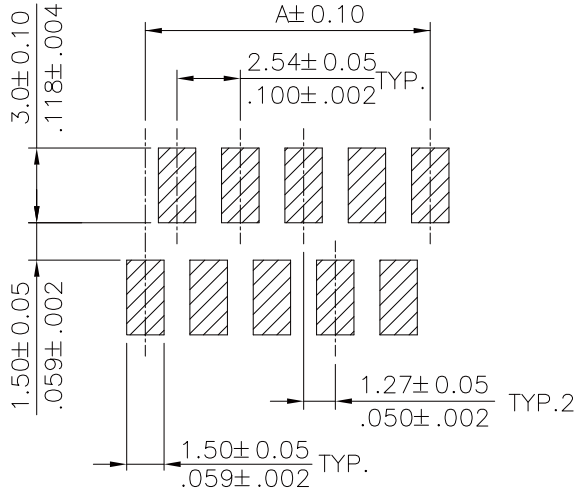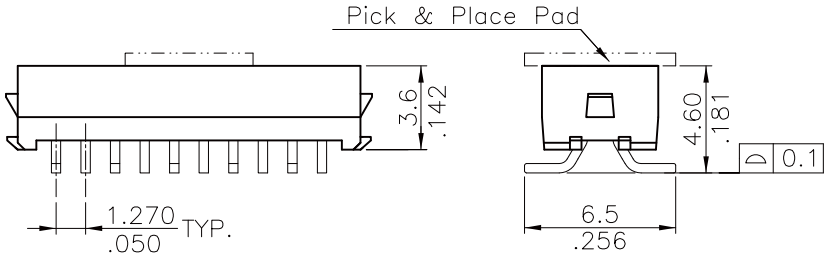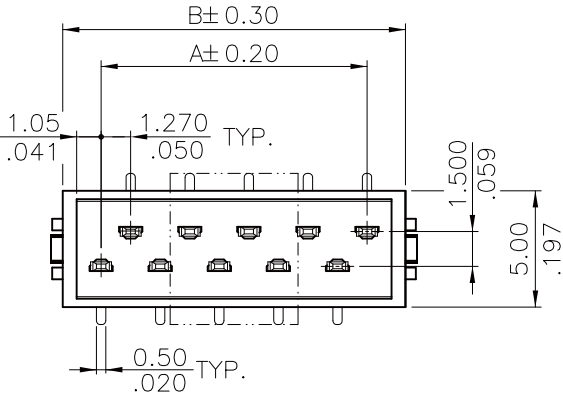

 Solder Pad Pattern

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X. ±
.X ±
.XX ±
.XXX ±
ANG ±




ORDER INFORMATION

MIM-BVCR-xx-LF

SERIES | | | | LEADFREE
04~26WAY
REEL
CAP
180°SMT
BOX



DESCRIPTION:

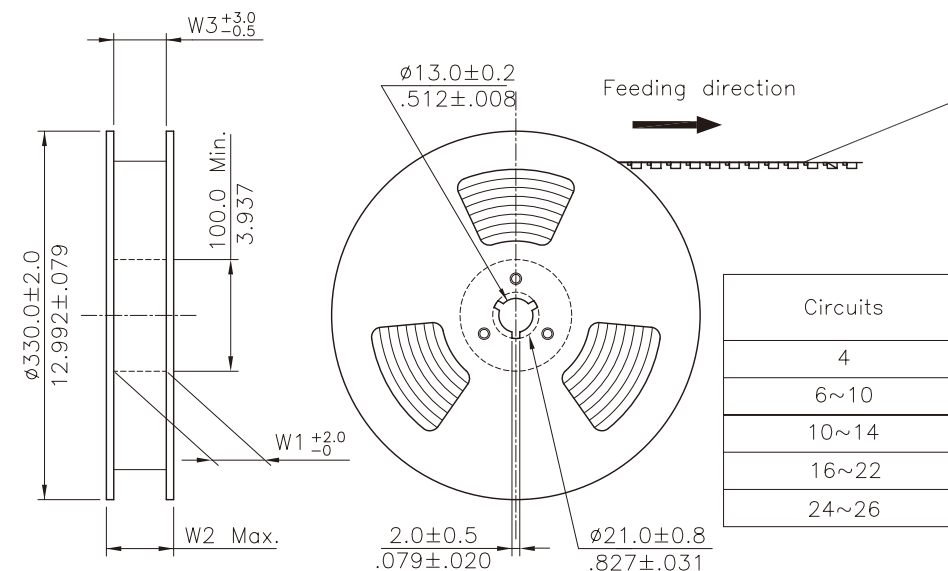


NOTES:

1. 10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$.
2. Carrier camber not to exceed 1 mm in 100 mm.
3. Material :Transparent Anti-static Polysyrene.
4. All dimensions meet EIA-481-3 requirements.
5. Thickness : $0.40 \pm 0.05\text{mm}$.
6. Packing length per 22" Reel : 30.6 Meters.
7. Component load per 13" Reel :1000 pcs.

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
4	16.0(.630)	—	16.5(.650)	22.5(.886)	16.5(.650)	11
6~10	24.0(.945)	—	24.5(.965)	30.5(1.201)	24.5(.965)	9
10~14	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
16~22	44.0(1.732)	40.40(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
24~26	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.461)	56.5(2.224)	4

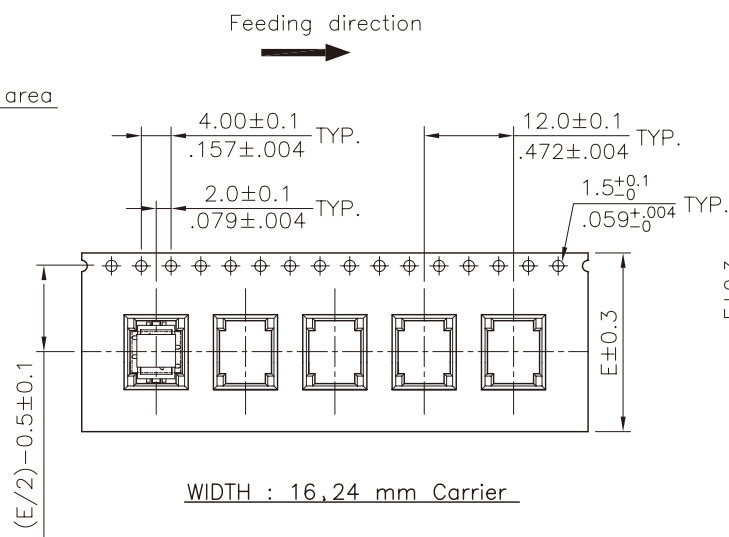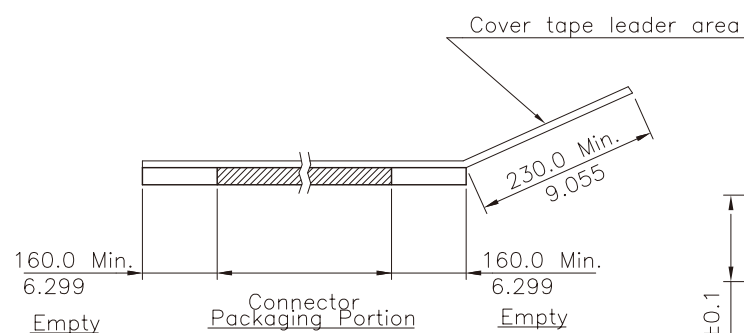

WIDTH : 16.24 mm Carrier

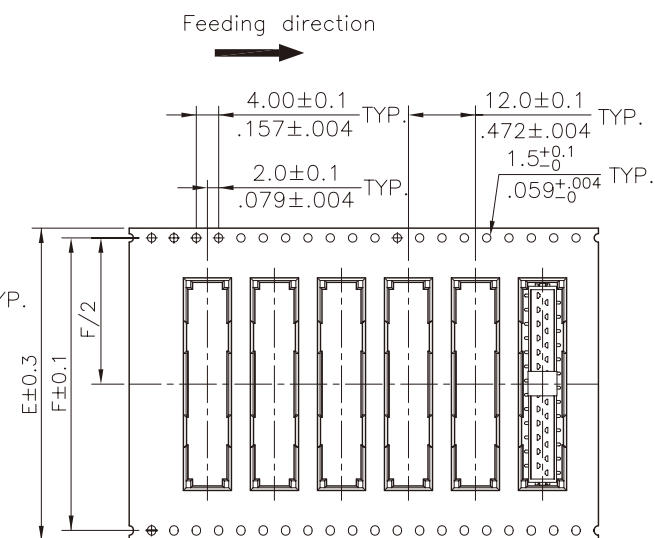

WIDTH : 32.44.56 mm Carrier

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PJECTION



ORDER INFORMATION

MIM-BVCR-xx-LF

SERIES
LEADFREE
04-26WAY
REEL
CAP
180°SMT
BOX

DESCRIPTION: