
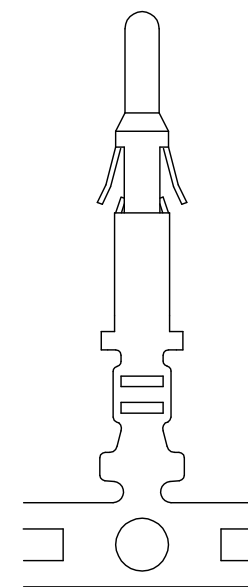


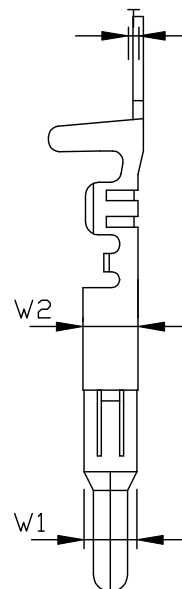


| 項目 | 規格               |
|----|------------------|
| T  | $0.2 \pm 0.03$   |
| L  | $17.90 \pm 0.35$ |
| IS | $3.30 \pm 0.4$   |
| WS | $2.0 \pm 0.4$    |
| W  | $1.30 \pm 0.07$  |
| W1 | $2.0 \pm 0.1$    |
| W2 | $2.10 \pm 0.1$   |
| W3 | $3.30 \pm 0.25$  |
| W4 | $3.2 \pm 0.2$    |
| E  | $4.90 \pm 0.2$   |
| H8 | $2.0 \pm 0.3$    |
| H9 | $3.40 \pm 0.3$   |

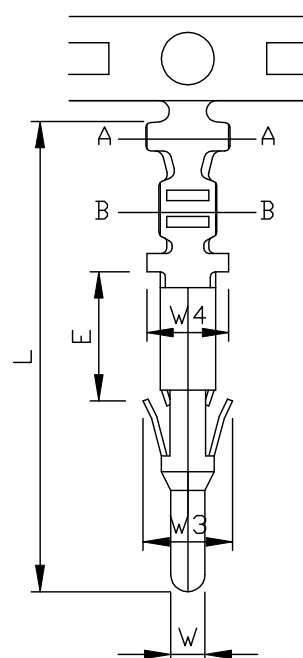

插入力 1.2 KG MAX

脫拔力 4.5 KG MIN

| 適用電線  | 線皮外徑    | 端子材質      | 包裝數量     | 重量 | 表面處理       | 連續, 單粒 |
|-------|---------|-----------|----------|----|------------|--------|
| 22-18 | 1.3-2.7 | BRASS. SH | 7000 PCS | KG | TIN-Plated | BS     |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

EL-M-18-LF  
SERIES | LEADFREE  
18~22AWG  
MALE TERMINAL

DESCRIPTION: