




SPECIFICATIONS
 Circuit:1,2,3,4,6,9,12,15
 Voltage rating:300V AC,DC
 Current rating:12A AC,DC
 Withstanding voltage:1500V AC/minute
 Insulation resistance:1000M Ω HM min
 Temperature range:-25 C~+90 C
 Material:UL94V-2 nylon 66

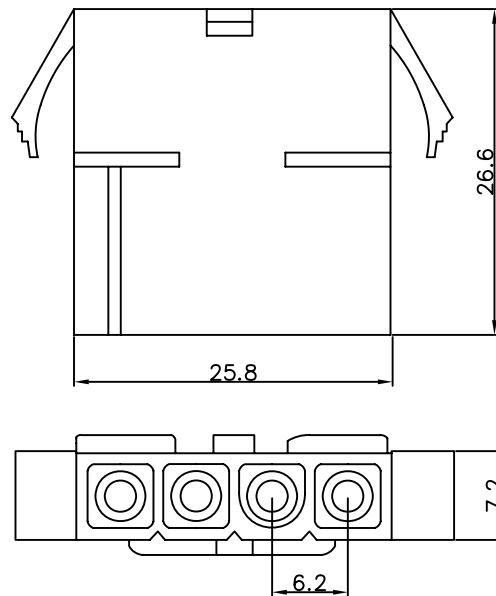

L-PE-1X04

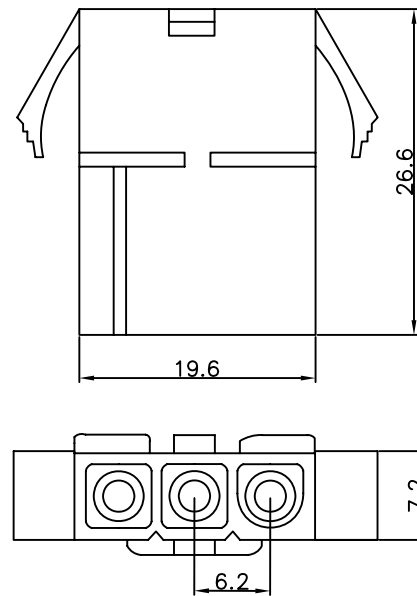

L-PE-1X03

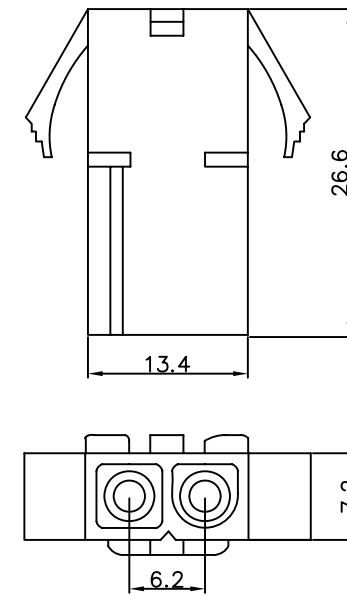

L-PE-1X02

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant


DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

TOLERANCES ARE

X, $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

SIZE A4

PPOJECTION



ORDER INFORMATION

L-PE-1Xxx-LF
 SERIES LEADFREE
 1X02:02 WAY
 1X04:04 WAY
 EAR
 MALE

DESCRIPTION: