
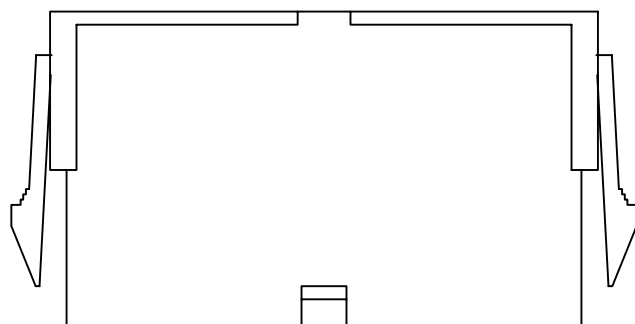



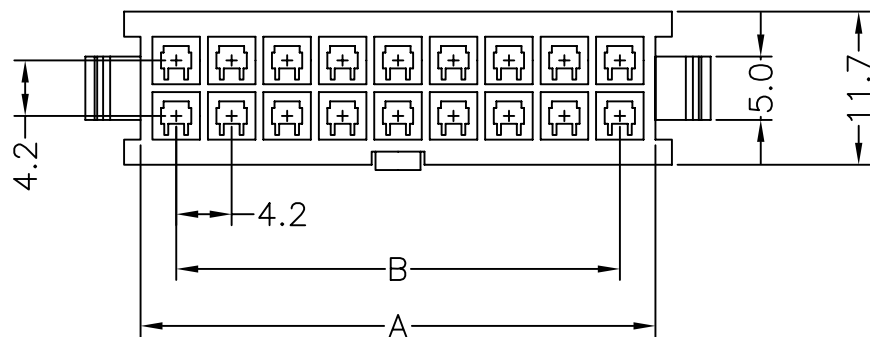

#### Features:

Material: NYLON 66 UL 94V-2

Available in 2 thru 24 circuits housing

Voltage rating 600V (R.M.S.)

Current 7 Amps per circuit

UNIT:mm

| Circuits | Dim.B | Dim.A | Circuits | Dim.B | Dim.A | Circuits | Dim.B | Dim.A |
|----------|-------|-------|----------|-------|-------|----------|-------|-------|
| 2        |       | 5.6   | 10       | 16.8  | 22.4  | 18       | 33.6  | 39.2  |
| 4        | 4.2   | 9.8   | 12       | 21.0  | 26.6  | 20       | 37.8  | 43.4  |
| 6        | 8.4   | 14.0  | 14       | 25.2  | 30.8  | 22       | 42.0  | 47.6  |
| 8        | 12.6  | 18.2  | 16       | 29.4  | 35.0  | 24       | 46.2  | 51.8  |

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X.  $\pm 0.40$

.X  $\pm 0.30$

.XX  $\pm 0.20$

.XXX  $\pm$

ANG  $\pm$

PJECTION



#### ORDER INFORMATION

MF-PH-2Xxx-LF  
SERIES | LEADFREE  
2X01-02WAY  
2X12-24WAY  
HOUSING  
MALE

DESCRIPTION: (4.20mm)MINI-FIT Power Connector System