
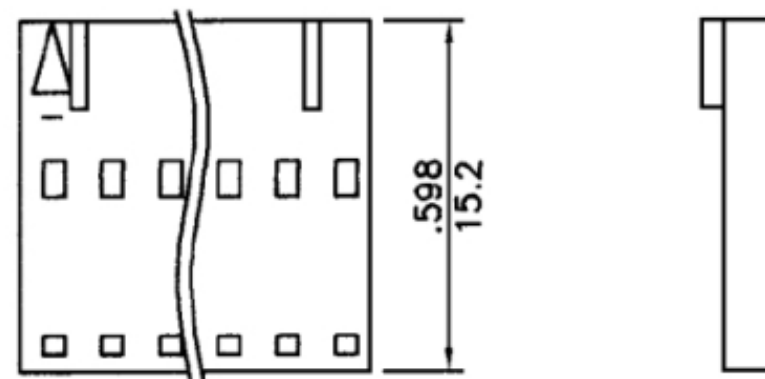
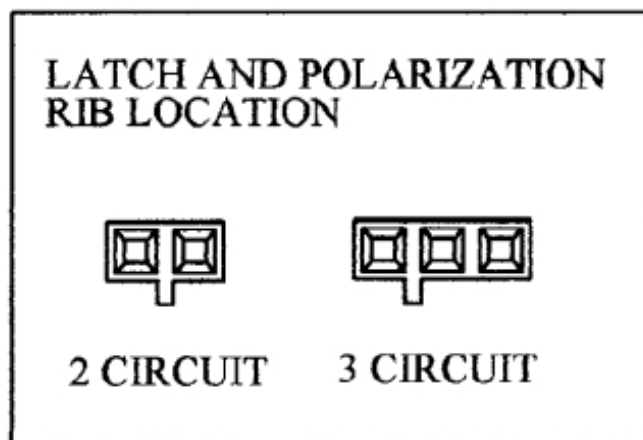


- \* Poles:2-12
  - \* Material:PBTP UL94V-0 ,BLACK
- Specifications
- \* Current rating: 2.5A AC, DC
  - \* Voltage rating: 250V AC, DC
  - \* Temperature range: -25°C~+85°C
  - \* Insulation resistance: 1,000M  $\Omega$  min.
  - \* Withstand voltage: 800V AC/minute

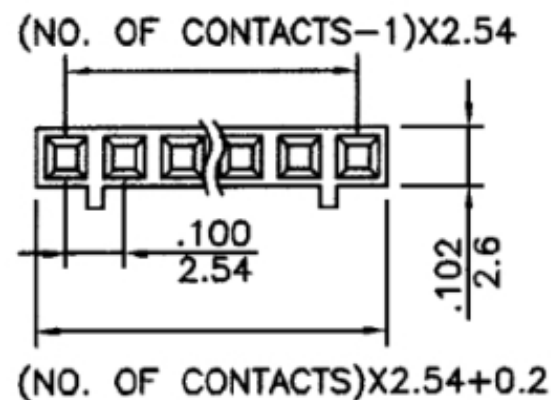

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**


DRAWING BY CY  
CHECKED BY GENIUS  
UNIT / mm      SCALE 1 : 1  
DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X,  $\pm$   
.X  $\pm$   
.XX  $\pm$   
.XXX  $\pm$   
ANG  $\pm$



**ORDER INFORMATION**

MCC-H-1Xxx-LF  
SERIES      LEADFREE  
1X02:02 WAY  
1X12:12 WAY  
HOUSING

DESCRIPTION: