
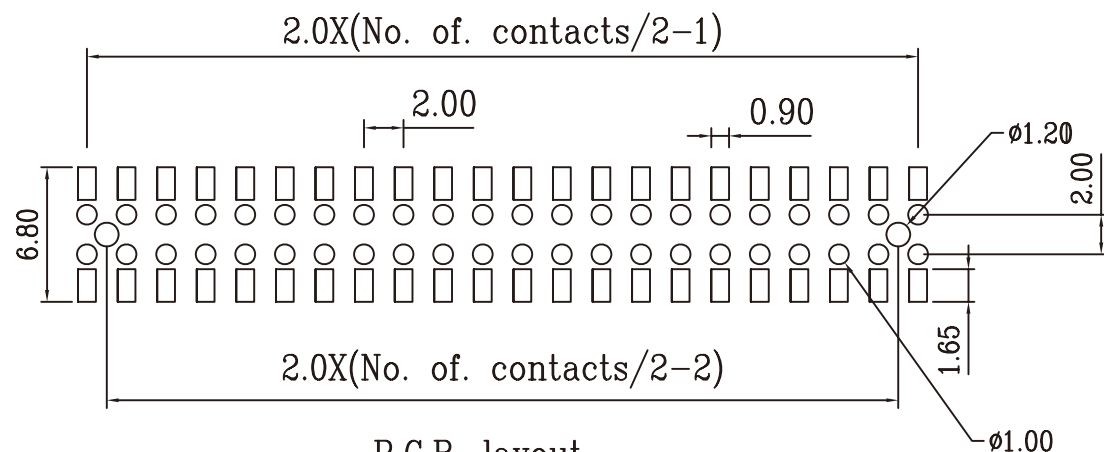
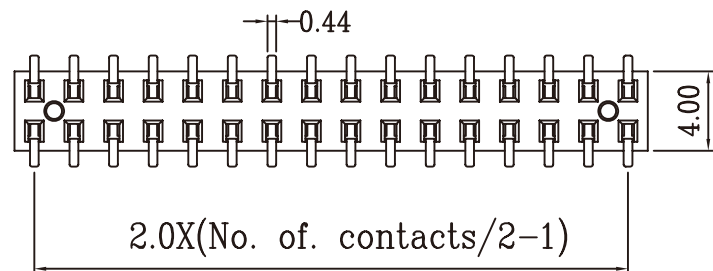



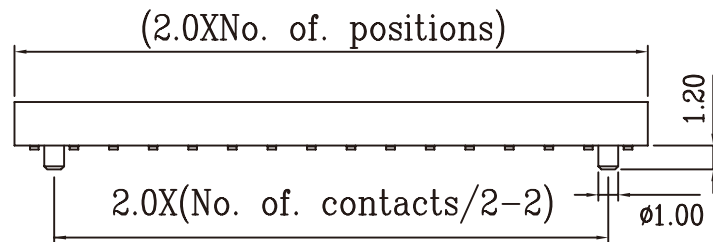

P.C.B. layout

SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40° – $+105^{\circ}$ C
- * Max Processing Temp: 230° for 30 seconds
(260° for 7 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P. (UL 94 V-0)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

P PROJECTION



ORDER INFORMATION

S-Z24P-2Xxx-LF
SERIES POST HIGH 2.40mm BOTTOM ENTRY
LEADFREE
2X03:06WAY
2X50:100WAY

DESCRIPTION: 2.0mm Female Socket h=2.4mm Bottom Entry type