
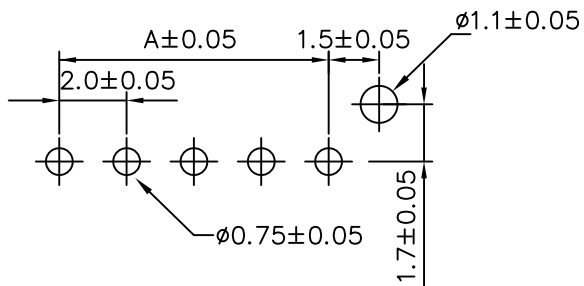


(2 to 9 circuits)

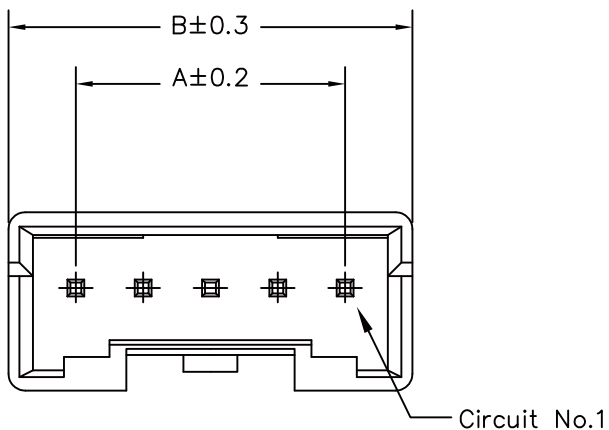

RECOMMENDED P.C.BOARD HOLE DIMM.

Specifications

Current Rating: 3A AC/ DC (Max)AWG#22

Voltage Rating: 250V AC/ DC

Temperature Range: -25°C ~ + 85°C


Contact Resistance: 20mΩ Max

Insulation Resistance: 1000M Ω Min

Withstand Voltage:800V AC/Minute

Pin Material: Brass/ Tin-plated/ Gold-plated

Wafer Material: Glass-filled PBT,UL94V-0,natural

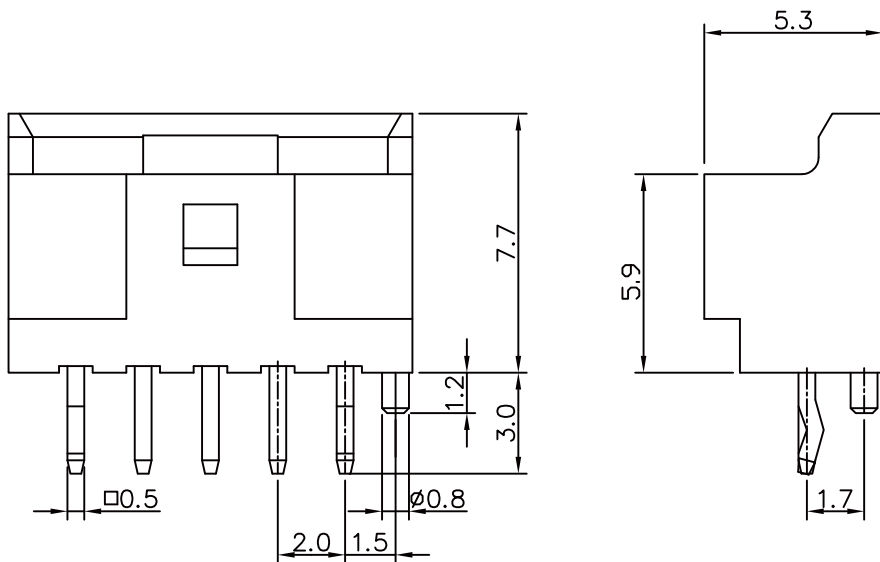

Poles	Dimension mm (in.)		Part No.
	A	B	
2	2.0(0.079)	6.0(0.236)	PA-DP-02
3	4.0(0.157)	8.0(0.315)	PA-DP-03
4	6.0(0.236)	10.0(0.394)	PA-DP-04
5	8.0(0.315)	12.0(0.472)	PA-DP-05
6	10.0(0.394)	14.0(0.551)	PA-DP-06
7	12.0(0.472)	16.0(0.630)	PA-DP-07
8	14.0(0.551)	18.0(0.709)	PA-DP-08
9	16.0(0.630)	20.0(0.787)	PA-DP-09

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm

SCALE 1 : 1

SIZE A4

PPOJECTION 

X.	±
.X	±
.XX	±
.XXX	±
ANG	±




ORDER INFORMATION

PA-DP-xx-LF
SERIES POST DIP 180° LEADFREE 02~15WAY


DESCRIPTION: 2.0mm Wire-to-Board Header DIP 180° Type

(5 to 6 circuits)

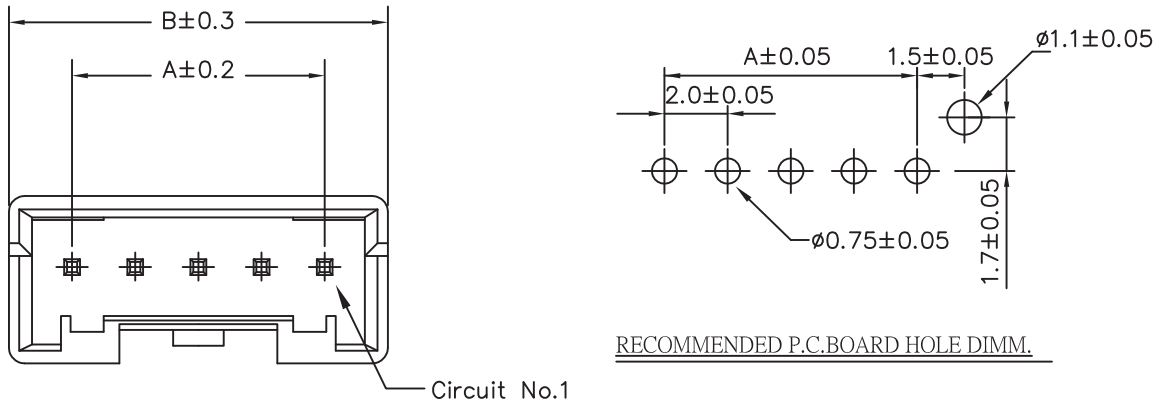

Specifications

Current Rating: 3A AC/ DC (Max)AWG#22
Voltage Rating: 250V AC/ DC
Temperature Range: -25°C ~ + 85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstand Voltage:800V AC/Minute
Pin Material: Brass/ Tin-plated/ Gold-plated
Wafer Material: Glass-filled PBT,UL94V-0,natural

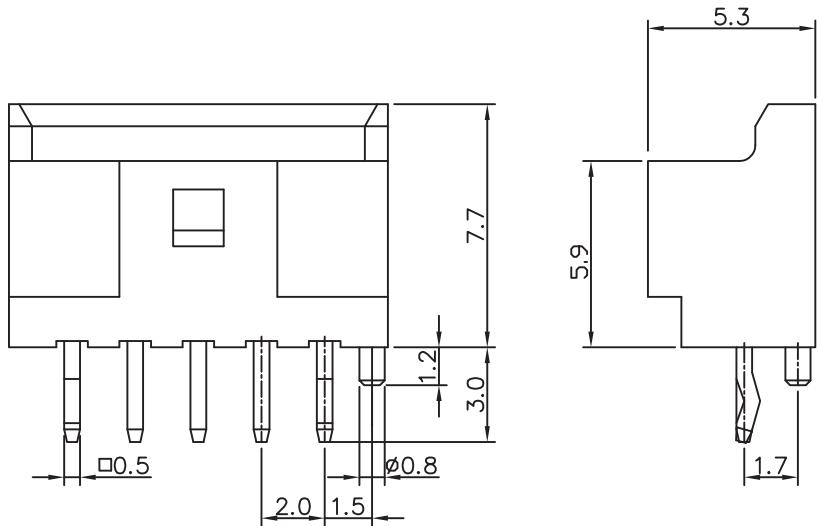

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION





ORDER INFORMATION



PA-DP-xx-LF
SERIES | T | LEADFREE
02~15WAY
POST
DIP 180°

DESCRIPTION: 2.0mm Wire-to-Board Header DIP 180° Type

(10 to 15 circuits)

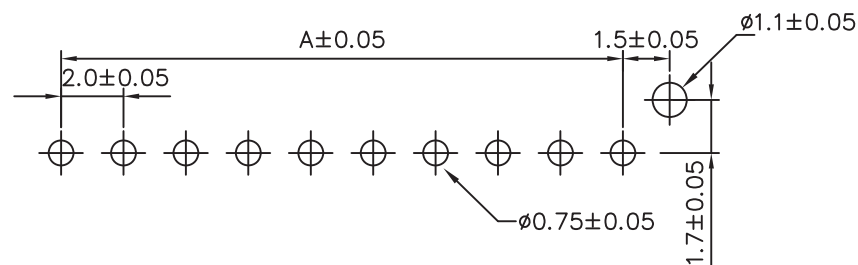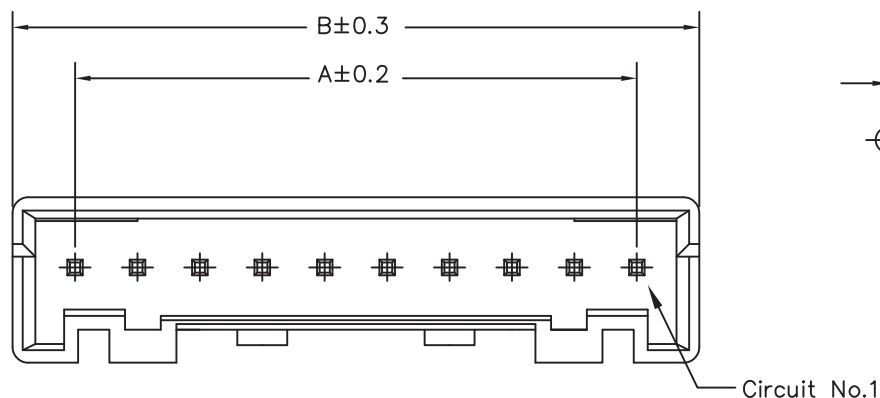

RECOMMENDED P.C.BOARD HOLE DIMM.

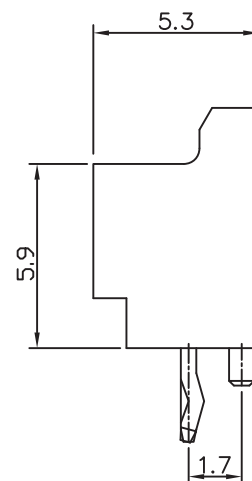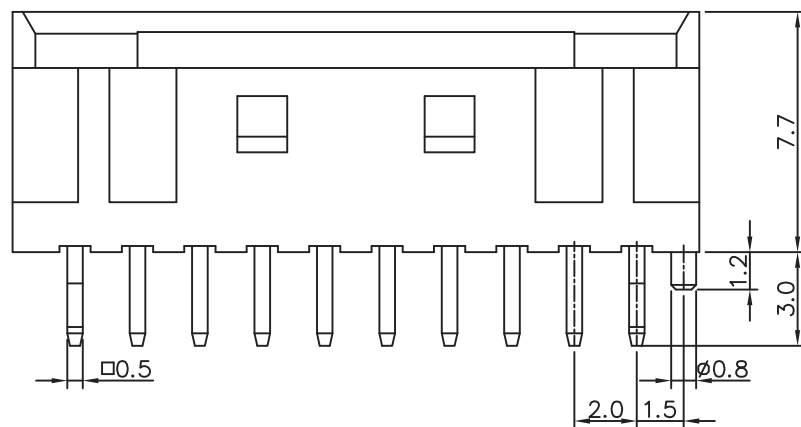

Specifications

Current Rating: 3A AC/ DC (Max)AWG#22
 Voltage Rating: 250V AC/ DC
 Temperature Range: -25°C ~ + 85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage:800V AC/Minute
 Pin Material: Brass/ Tin-plated
 Wafer Material: Glass-filled PBT,UL94V-0,natural

Poles	Dimension mm (in.)		Part No.
	A	B	
10	18.0(0.709)	22.0(0.866)	PA-DP-10
11	20.0(0.787)	24.0(0.945)	PA-DP-11
12	22.0(0.866)	26.0(1.024)	PA-DP-12
13	24.0(0.945)	28.0(1.102)	PA-DP-13
14	26.0(1.024)	30.0(1.181)	PA-DP-14
15	28.0(1.102)	32.0(1.260)	PA-DP-15

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION



ORDER INFORMATION

PA-DP-xx-LF
 SERIES T LEADFREE
 02~15WAY
 POST
 DIP 180°

DESCRIPTION: 2.0mm Wire-to-Board Header DIP 180° Type