




Durability: 50,000 cycles min.

RoHS Directive 2002/95/EC Compliant


Operation: Normally Open

Manual soldering: 360°C, 3 sec. Max.


Storage humidity: 10 % ~ 95 % RH

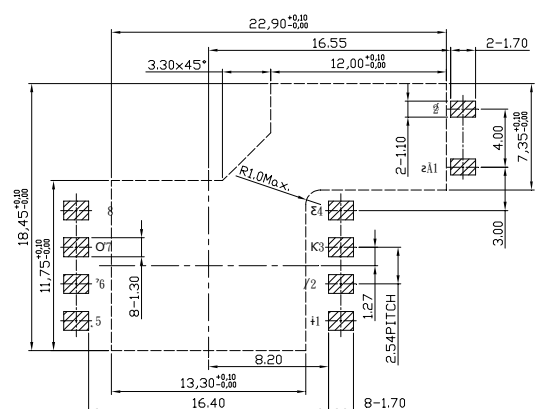

PCB Layout Reference PCB Board A (Frontispiece)

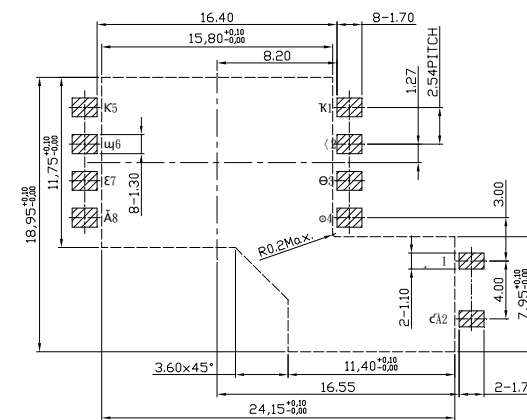

PCB Layout Reference PCB Board B (Inverse)



www.morethanall.com

RoHS Compliant

SIZE A4

TOLERANCES ARE

10



16:PCB BOARD B

DESCRIPTION: