
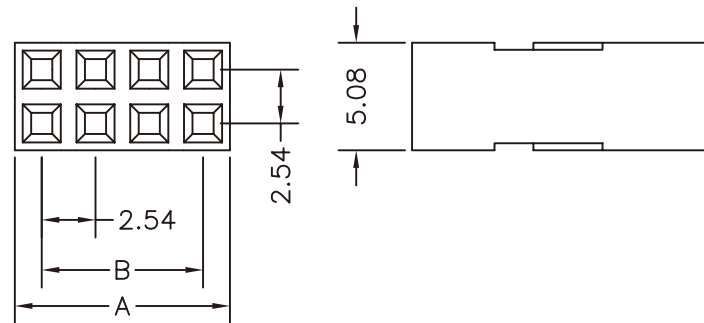



*Poles:4-80
 *Material:Noryl UL 94-V1,Black

Specifications

*Current rating:3A AC,DC
 *Voltage rating:250V AC,DC
 *Temperature range:-25°C~+85°C
 *Insulation resistance:1,000M OHM min.
 *Withstand voltage:800V AC/minute



CIRCUITS	PART NO.	DIMENTION		CIRCUITS	PART NO.	DIMENTION	
		A	B			A	B
4	PV-H-2X02	5.08	2.54	44	PV-H-2X22	55.88	53.34
6	PV-H-2X03	7.62	5.08	46	PV-H-2X23	58.42	55.88
8	PV-H-2X04	10.16	7.62	48	PV-H-2X24	60.96	58.42
10	PV-H-2X05	12.70	10.16	50	PV-H-2X25	63.50	60.96
12	PV-H-2X06	15.24	12.70	52	PV-H-2X26	66.04	63.50
14	PV-H-2X07	17.78	15.24	54	PV-H-2X27	68.58	66.04
16	PV-H-2X08	20.32	17.78	56	PV-H-2X28	71.12	68.58
18	PV-H-2X09	22.86	20.32	58	PV-H-2X29	73.66	71.12
20	PV-H-2X10	25.40	22.86	60	PV-H-2X30	76.20	73.66
22	PV-H-2X11	27.94	25.40	62	PV-H-2X31	78.74	76.20
24	PV-H-2X12	30.48	27.94	64	PV-H-2X32	81.28	78.74
26	PV-H-2X13	33.02	30.48	66	PV-H-2X33	83.82	81.28
28	PV-H-2X14	35.56	33.02	68	PV-H-2X34	86.36	83.82
30	PV-H-2X15	38.10	35.56	70	PV-H-2X35	88.90	86.36
32	PV-H-2X16	40.64	38.10	72	PV-H-2X36	91.44	88.90
34	PV-H-2X17	43.18	40.64	74	PV-H-2X37	93.98	91.44
36	PV-H-2X18	45.72	43.18	76	PV-H-2X38	96.52	93.98
38	PV-H-2X19	48.26	45.72	78	PV-H-2X39	99.06	96.52
40	PV-H-2X20	50.80	48.26	80	PV-H-2X40	101.60	99.06
42	PV-H-2X21	53.34	50.80	100	PV-H-2X50	127.00	124.46

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

PV-H-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X50:100WAY
 HOUSING

DESCRIPTION: .100"(2.54mm)CONNECTOR HOUSING