


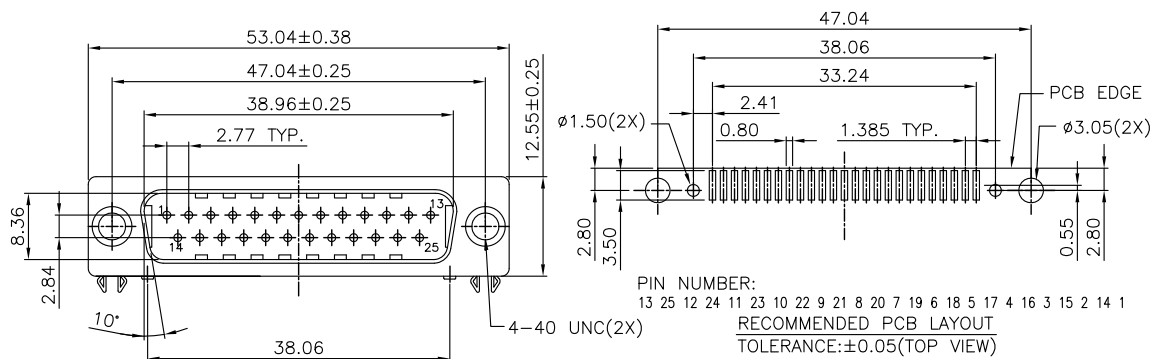

NOTES:

1. MATERIAL:

HOUSING: HIGH TEMP THERMOPLASTIC, UL94V-0, BLACK COLOR
TERMINAL: PHOSPHOR BRONZE
METAL SHELL: SPCC
BOARD LOCK & NUT: BRASS

2. PLATING:

TERMINAL:

CONTACT AREA: SELECTIVE GOLD (Au) PLATING
SOLDER TAIL: TIN (Sn), THICKNESS=100 MICROINCH MIN. (2.54 MICROMETER MIN.)
UNDER PLATE: NICKEL (Ni), THICKNESS=50 MICROINCH MIN. (1.27 MICROMETER MIN.)




METAL SHELL:

NICKEL (Ni), THICKNESS=80 MICROINCH MIN. (2.032 MICROMETER MIN.)
UNDER PLATE: COPPER (Cu), THICKNESS=40 MICROINCH MIN. (1.016 MICROMETER MIN.)

BOARD LOCK:

TIN (Sn), THICKNESS=80 MICROINCH MIN. (2.032 MICROMETER MIN.)
UNDER PLATE: NICKEL (Ni), THICKNESS=50 MICROINCH MIN. (1.27 MICROMETER MIN.)
NUT: NICKEL (Ni), THICKNESS=50 MICROINCH MIN. (1.27 MICROMETER MIN.)

3. RECOMMENDED PCB THICKNESS: 1.60±0.05mm

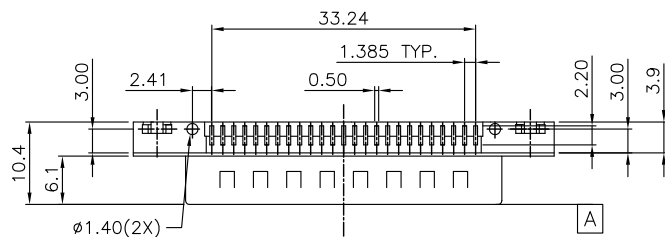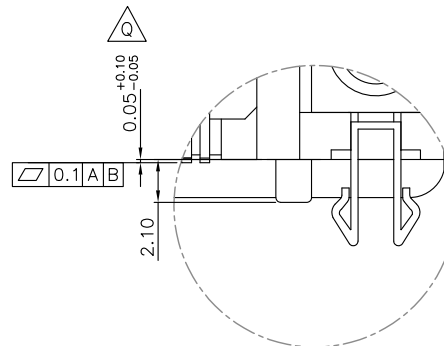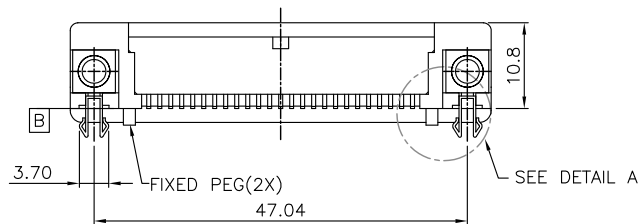

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°



ORDER INFORMATION

DW-PN22-25-LF
SERIES | T | LEADFREE
CLIP
NUT
MALE

DESCRIPTION: D SUBMINIATURE, RIGHT ANGLE
SURFACE-MOUNT LOW PROFILE 25 POSITION, MALE