

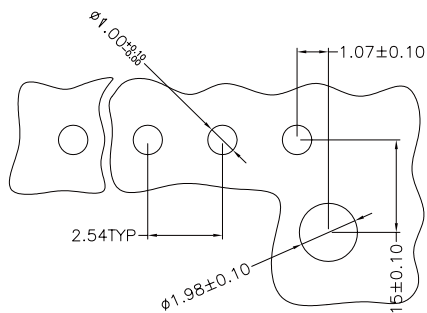
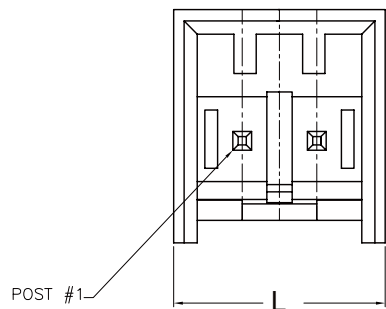
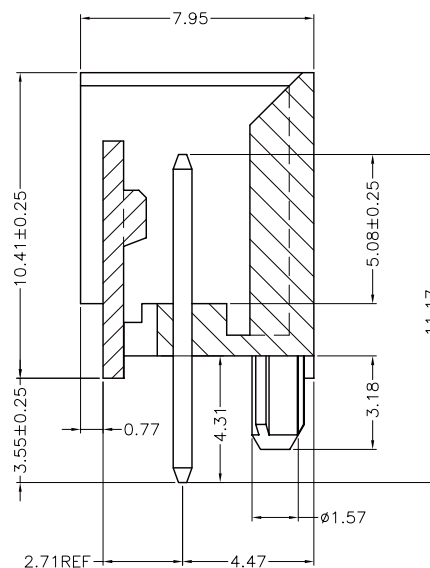



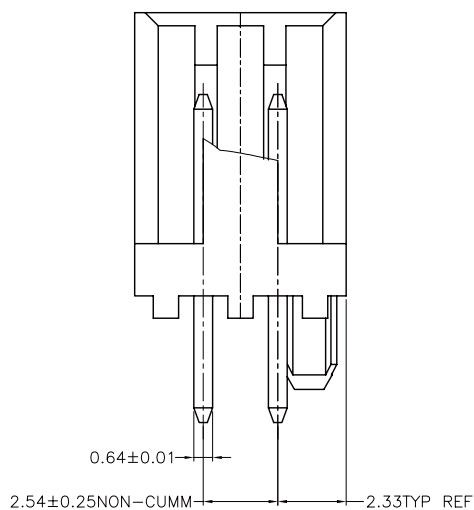

RECOMMENDED MOUNTING HOLE PATTERN
FOR .063 THK PRINTED CIRCUIT BOARD

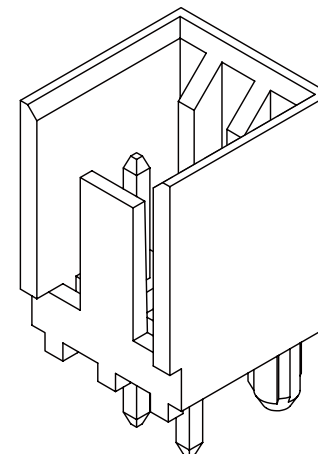

1.484	37.69	14
1.384	35.15	13
1.284	32.61	12
1.184	30.07	11
1.084	27.53	10
.984	24.99	9
.884	22.45	8
.784	19.91	7
.684	17.37	6
.584	14.83	5
.484	12.29	4
.384	9.75	3
.284	7.21	2
IN	MM	NO. OF POSITIONS
L		

MATERIALS:

PLASTIC HOUSING: HIGH TEMP. THERMOPLASTIC FLAMMABILITY RATING UL 94V-0.

CONTACT : 0.64 SQUARE PIN C2680-H BRASS, TIN PLATING OVER NICKEL.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

MT-DBP-xx-LF
SERIES POST BOX
LEADFREE 02~14WAY
DIP 180°

DESCRIPTION: