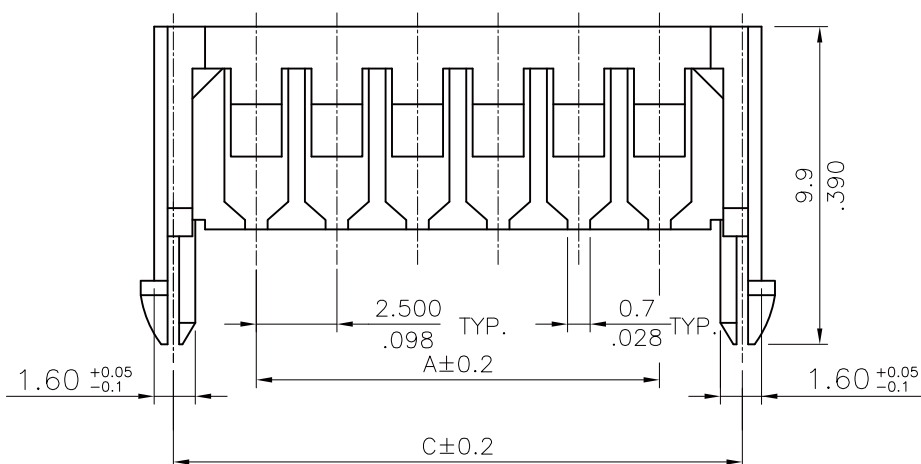
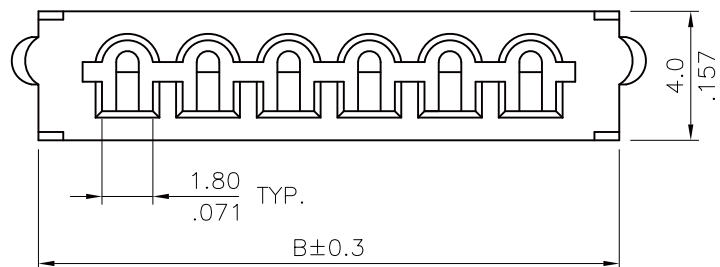



A = 2.5 * No. of Spaces

B = A + 5.3


C = A + 5.0

△ * Available in 3 & 6 circuits

Connector style:
For Flat Cable
Insulator: Nylon, UL 94V-0, Color Nature

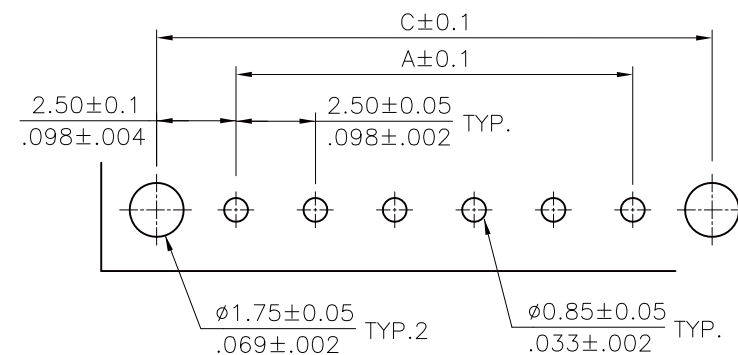

Recommended P.C. Board Layout

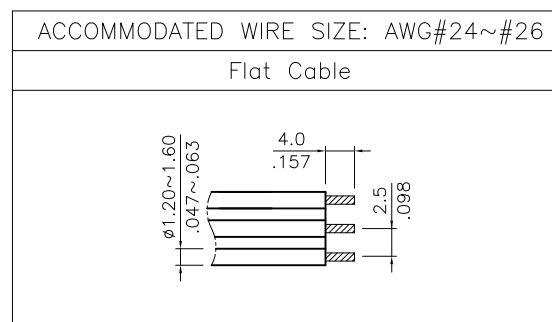

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±



ORDER INFORMATION

WH-DB-xx-LF
SERIES | LEADFREE
02~15WAY
CABLE
DIP 180°

DESCRIPTION: 2.50mm WIRE HOLDER CONNECTOR