
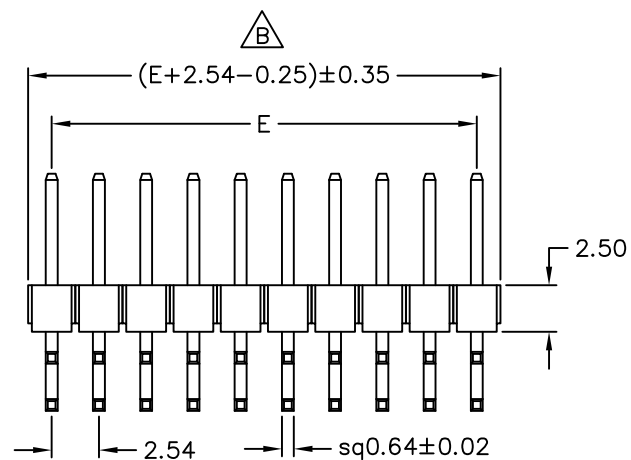
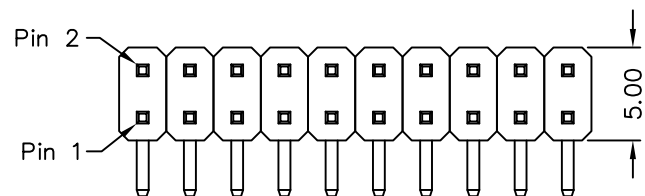


Recommended P.C.B Layout

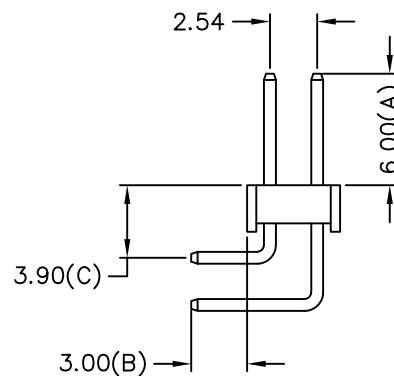

MATERIAL

Insulator: PBT UL94-V0 $\triangle B$

Contact Pin : Brass Gold Flash

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

POLES	DIM E	POLES	DIM E
		21	50.80
2	2.54	22	53.34
3	5.08	23	55.88
4	7.62	24	58.42
5	10.16	25	60.96
6	12.70	26	63.50
7	15.24	27	66.04
8	17.78	28	68.58
9	20.32	29	71.12
10	22.86	30	73.66
11	25.40	31	76.20
12	27.94	32	78.74
13	30.48	33	81.28
14	33.02	34	83.82
15	35.56	35	86.36
16	38.10	36	88.90
17	40.64	37	91.44
18	43.18	38	93.98
19	45.72	39	96.52
20	48.26	40	99.06

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION Φ

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$ 3°



ORDER INFORMATION

H-R-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X40:80WAY
DIP 90°

DESCRIPTION: PIN HEADER 2.54*2.54mm RIGHT ANGLE TYPE, DUAL ROWS