

Note:




1. Material: PA66, UL94V-0
2. Compliant with IEC 60335-1 (GWT750°C, <2s)
- 3.Housing color:Nature (White)

Material

Current Rating:16A max.AC/DC

Voltage Rating:380V AC/DC

Temperature Rating:-40°C~+110°C

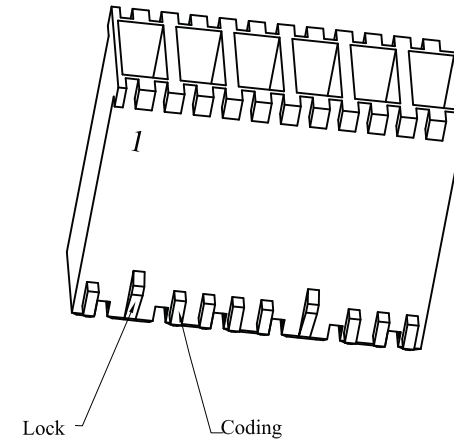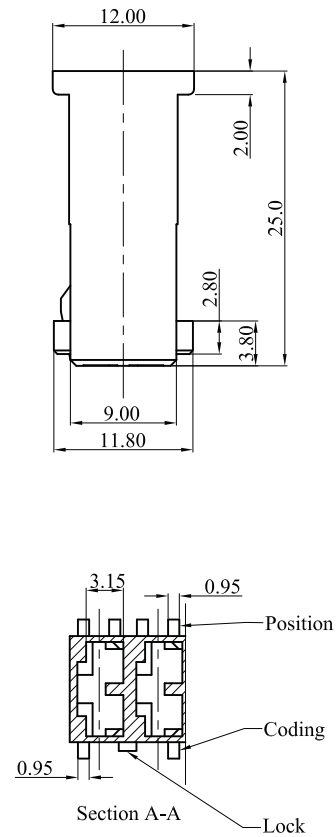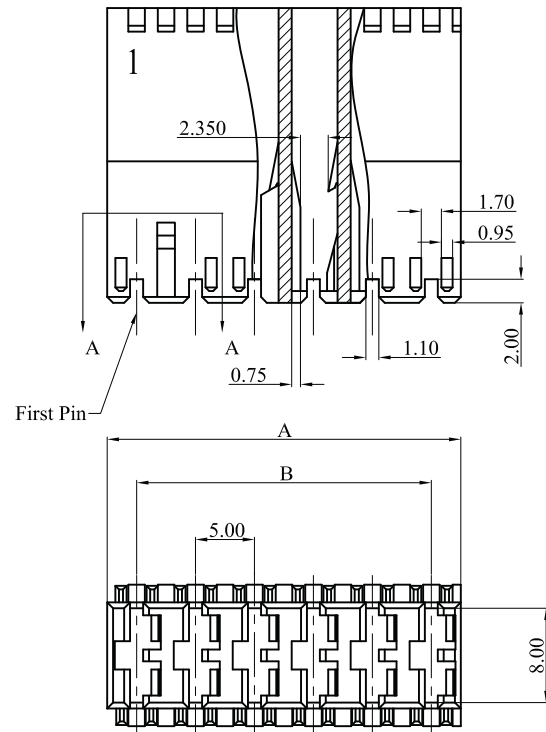

12	60	55
11	55	50
10	50	45
9	45	40
8	40	35
7	35	30
6	30	25
5	25	20
4	20	15
3	15	10
2	10	5
CIRCUITS	DIM.A	DIM.B

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

ZZZPRUHWKDQDOOFR

5R+6&RPSOLDQW

DRAWING BY &<

CHECKED BY *(1,86

UNIT / mm

SCALE 1 : 1

'\$7(

6,=(\$

TOLERANCES ARE

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



25' (5 ,1)250\$7,21

5676+[[V)

6(5,(6

)(\$)/5((

.(</2&.7<3(

)(0\$/(

+286,1*

DESCRIPTION:

TYPE	0A	0B	0C	0D	0E	0F	0G	0L	0I	02	03	04
KEY/LOCK 5-way												
	05	06	07	08	09	11	12	13	14	17	18	20
	21	22	23	24	25	26	27	28	29	30	31	33
	34	35	36	40	43	45	49	50	51	64	69	73
	80	81	82	83	84	85	86	87	88	PB		

TYPE	0A	0B	0C	0D	0E	0I	04	06	14	15
KEY/LOCK 6-way										
	21	29	30	50	51	71	73	80	81	

TYPE	0A	0B	1B	0C	0D	0E	03	04	14	22
KEY/LOCK 7-way										
	23	27	30	31	32	34	35	38	40	41
	42	43	45	48	51	59	69	76	80	81
	83									

5R+6&RPSOLDQW

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

ZZZPRUHWKDQDOOFRI

DRAWING BY &<

CHECKED BY *(1,86

UNIT / mm


SCALE 1 : 1

'\$7(

6,=(\$

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION





25' (5 ,1)250\$7,21


5676+[(\V)
6(5,(6
T T T /(\$)5((
:(.</2&.7<3(
:\$<
:\$<
)(0\$/(
+286,1*

DESCRIPTION:

TYPE	27	30	59	65	80
KEY/LOCK 12-way					

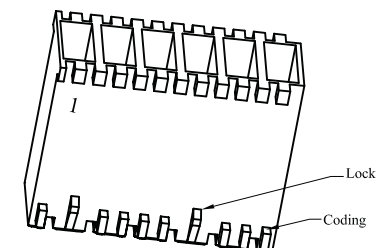

5R+6&RPSOLDQW		TOLERANCES ARE	
 煜倫股份有限公司 ZZZPRUHWKDDOOFRI	DRAWING BY &<		X, ±
	CHECKED BY *(1,86		.X ±
	UNIT / mm	SCALE 1 : 1	.XX ±
	'\$7(		.XXX ±
6,=\$		PPOJECTION	



25' (5 ,1)250\$7,21

5676+[(\V)

6(5,(6 T T T T/(\$)5((

:\$< .(</2&.7<3(

)0\$/(:\$<

+286,1*

DESCRIPTION: