


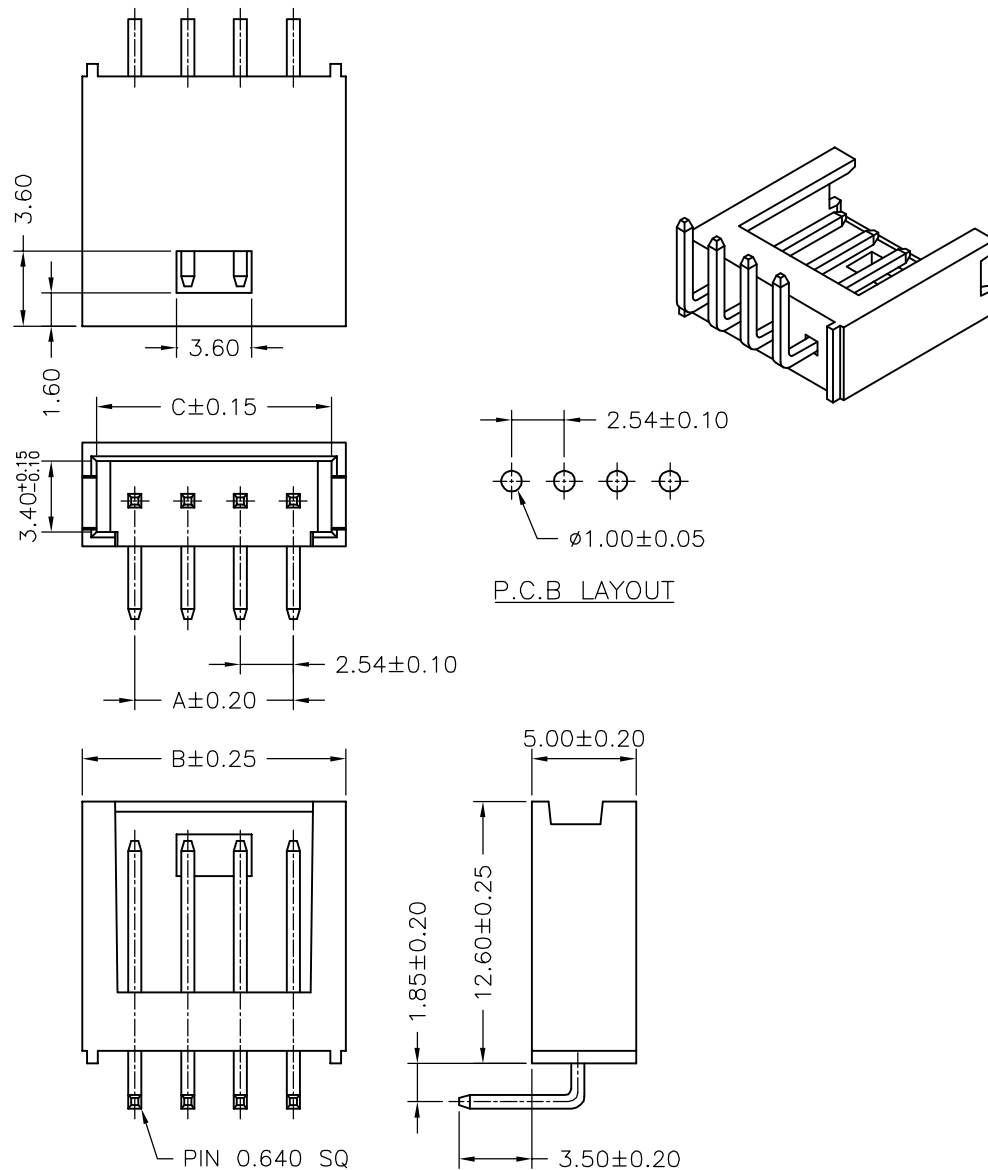

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass/Tin-plated
 Material: PBT,UL94V-0
 Color: Natural(Black)

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
MOD-R-1X02	2.54	7.62	6.22
MOD-R-1X04	7.62	12.70	11.30
MOD-R-1X05	10.16	15.24	13.84
MOD-R-1X06	12.70	17.78	16.38
MOD-R-1X08	17.78	22.86	21.46
MOD-R-1X10	22.86	27.94	26.54

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.05
 ANG ±



ORDER INFORMATION

MOD-R-1Xxx-LF
 SERIES | LEADFREE
 1X02:02WAY
 1X10:10WAY
 DIP 90°

DESCRIPTION: 2.54mm PITCH 90° WAFER