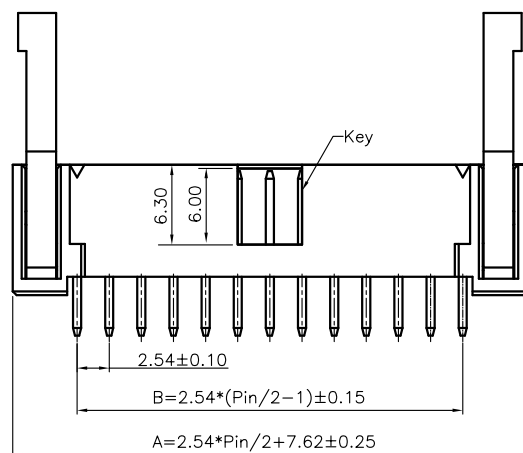
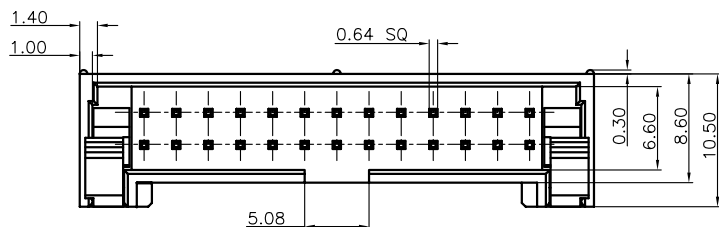


Detail A
Short Latch

Specifications:

Current rating: 3.0 Amps

Voltage rating: 250 AC, DC

Contact resistance: 20mohm max.

Insulation resistance: 1,000Mohm min.

Dielectric Withstanding: 600V AC/Minute

Operating Temperature: -40°C ~ +105°C


Materials:

Insulator: High Tempe. Plastic (PBT UL94V-0)

Standard Color: Black


Contact: Brass

Plating: Gold Plated



Dimension :

Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B
6	15.24	5.08	16	27.94	17.78	34	50.80	40.64
8	17.78	7.62	20	33.02	22.86	40	58.42	48.26
10	20.32	10.16	24	38.10	27.94	50	71.12	60.96
12	22.86	12.70	26	40.64	30.48	60	83.82	73.66
14	25.40	15.24	30	45.72	35.56	64	88.90	78.74

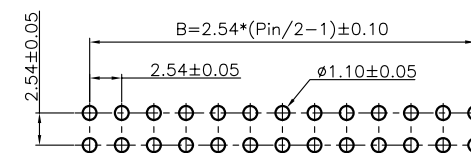

Recommended PCB Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X, ±

.XX, ±

.XXX, ±

ANG ±




PPOJECTION




ORDER INFORMATION

FL-DSG-xx-LF
SERIES LEADFREE
06~64WAY
FULL GOLD
SHORT
DIP 180°


DESCRIPTION: 2.54mm Box Header Straight Type

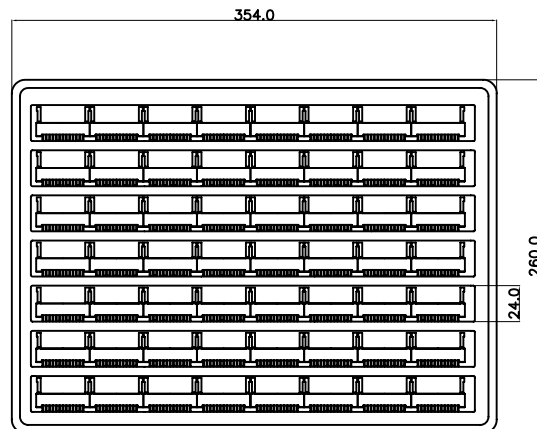


TRAY LAYOUT




COVER TRAY





BOTTOM TRAY




TRAY



23TRAYS



CARTON

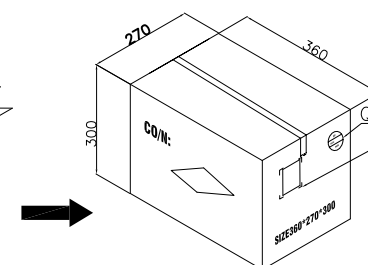

QC PASS LABEL
EXPORT LABEL

NOTE:

1.DIMENSION

TRAY SIZE:354(L)x260(W)x11.8(H) (MM)

CARTON SIZE:360(L)x270(W)x300(H) (MM)

2.QUANTITY

CIRCUITS	PCS/TARY	TARYS/CARTON	Q'TY
06	140	23	3220
08	119	23	2737
10	105	23	2415
12	91	23	2093
14	84	23	1932
16	77	23	1771
20	63	23	1449
24	56	23	1288
26	49	23	1127
30	42	23	966
34	42	23	966
40	35	23	805
50	28	23	644
60	21	23	483
64	21	23	483

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FL-DSG-xx-LF
SERIES LEADFREE
06~64WAY
FULL GOLD
SHORT
DIP 180°

DESCRIPTION: 2.54mm Box Header Straight Type Packing List