

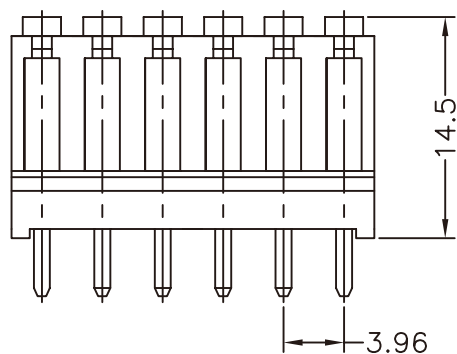
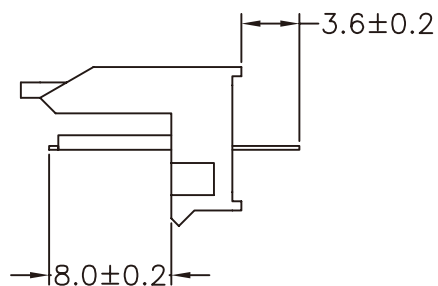


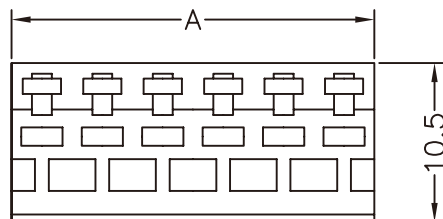

MATERIAL: NYLON 66, UL94V-2
 BRASS PIN
 CURRENT RATING: 7A AC, DC
 VOLTAGE RATING: 250V AC, DC
 TEMPERATURE RANGE: -25°C ~ +85°C
 INSULATION RESISTANCE: 1,000M OHM min.
 WITHSTAND VOLTAGE: 1500V AC/minute

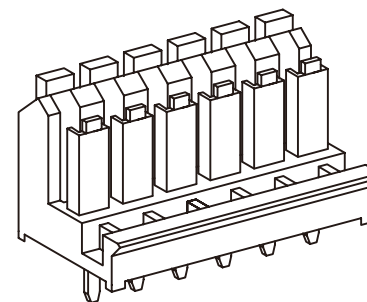

CIRCUITS	PART NO	DIMENSION-A
6	PB-D-06	23.8±0.10
12	PB-D-12	47.5±0.20

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com


RoHS Compliant

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1:1
 DATE
 SIZE A4

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

P PROJECTION



ORDER INFORMATION

PB-D-xx-LF
 SERIES | LEADFREE
 06.12WAY
 DIP 180°

DESCRIPTION: 3.96mm POWER BASE 6P & 12P