
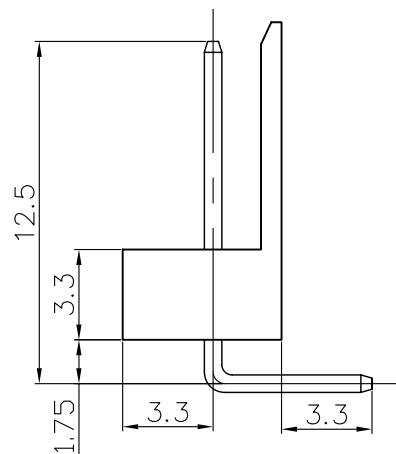

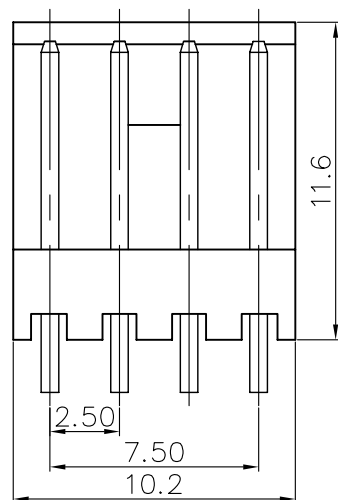


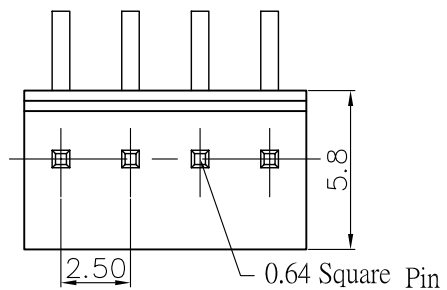

SPECIFICATIONS

Electrical

Current Rating: 2A AC, DC

Voltage Rating: 100V AC/ max.

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 1000M Ω / min.


Withstand Voltage: 800V AC/ min.

Contact Resistance: 20M Ω / max.

Material

Terminal Material: Tin/ Gold Plated

Material: Nylon 66, UL94V-0

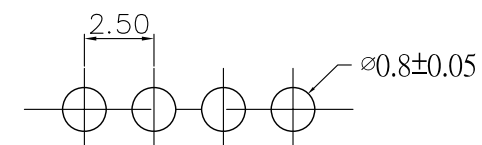

RECOMMENDED P.C.BOARD HOLE DIMM.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

EI-R-04-LF
SERIES | LEADFREE
04WAY
DIP 90°

DESCRIPTION: