


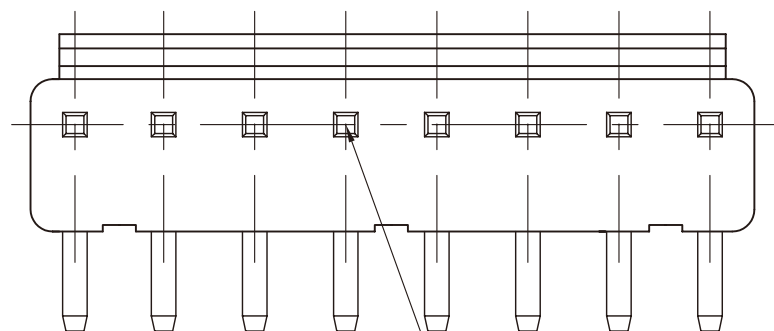


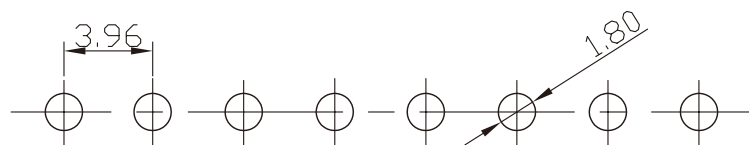

1.14mm Square Pin

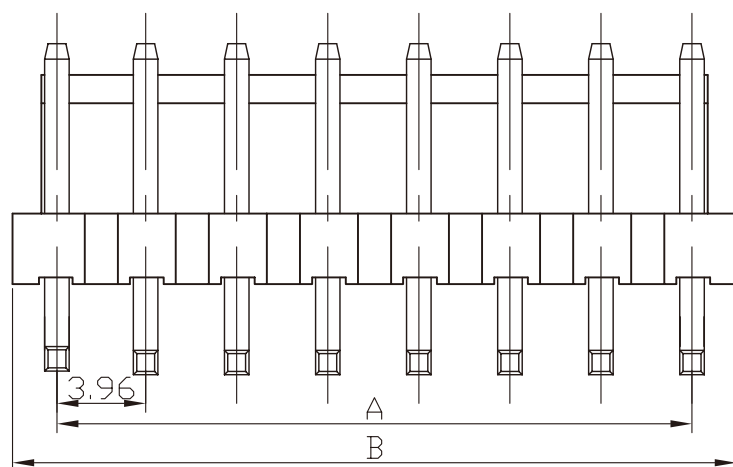

PCB LAYOUT COMPONENT SIDE

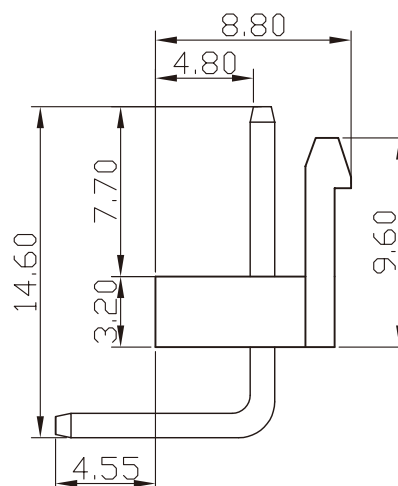

Specifications

Current Rating: 7A AC, DC

Voltage Rating: 250V AC Maximum

Operating Temp: -25°C ~ +85°C

Contact Resistance: 20MΩ Max

Insulation Resistance: 1000MΩ Min

Dielectric Withstanding Voltage: 1500V AC,DC Min

Terminal Material: Brass/Tin-plated

Material: Nylon 66, UL94V-0

Poles	Dimension mm		Part No.
	A	B	
2	3.96	7.92	VH-R-02
3	7.92	11.92	VH-R-03
4	11.88	15.84	VH-R-04
5	15.84	19.84	VH-R-05
6	19.80	23.80	VH-R-06
7	23.76	27.88	VH-R-07
8	27.72	31.74	VH-R-08
9	31.68	35.86	VH-R-09
10	35.64	39.90	VH-R-10
11	39.60	43.84	VH-R-11
12	43.56	47.92	VH-R-12
13	47.52	51.72	VH-R-13
14	51.48	55.92	VH-R-14

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

VH-R-xx-LF
SERIES LEADFREE
02~14WAY
DIP 90°

DESCRIPTION: