
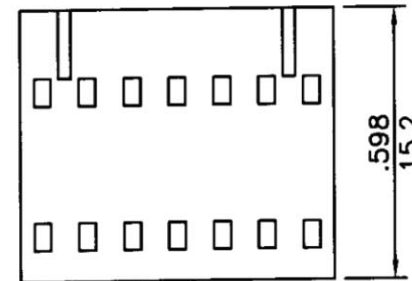
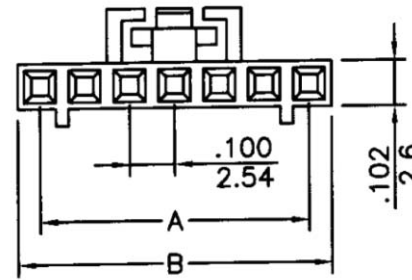


- \* Poles:2-25
- \* Material:PBT UL94V-0 ,BLACK

### Specifications

- \* Current rating: 2.5A AC, DC
- \* Voltage rating: 250V AC, DC
- \* Temperature range: -25°C~+85°C
- \* Insulation resistance: 1,000M $\Omega$  min.
- \* Withstand voltage: 800V AC/minute

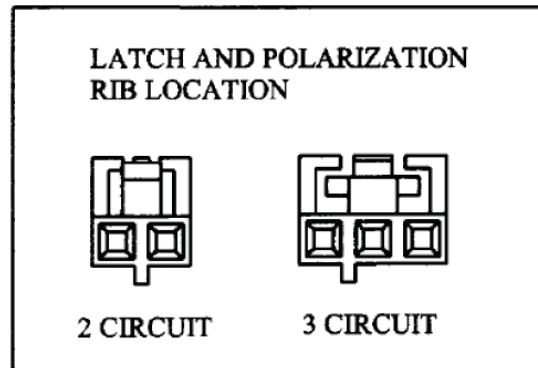

| CIRCUITS | DIMENSION in.(mm) |             | CIRCUITS | DIMENSION in.(mm) |             |
|----------|-------------------|-------------|----------|-------------------|-------------|
|          | A                 | B           |          | A                 | B           |
| 2        | 0.100(2.54)       | 0.205(5.2)  | 14       | 1.300(33.02)      | 1.409(35.8) |
| 3        | 0.200(5.08)       | 0.307(7.8)  | 15       | 1.400(35.54)      | 1.508(38.3) |
| 4        | 0.300(7.62)       | 0.406(10.3) | 16       | 1.500(38.10)      | 1.610(40.9) |
| 5        | 0.400(10.16)      | 0.508(12.9) | 17       | 1.600(40.64)      | 1.709(43.4) |
| 6        | 0.500(12.70)      | 0.606(15.4) | 18       | 1.700(43.18)      | 1.811(46.0) |
| 7        | 0.600(15.24)      | 0.709(18.0) | 19       | 1.800(45.72)      | 1.909(48.5) |
| 8        | 0.700(17.78)      | 0.807(20.5) | 20       | 1.900(48.26)      | 2.012(51.1) |
| 9        | 0.800(20.32)      | 0.909(23.1) | 21       | 2.000(50.80)      | 2.110(53.6) |
| 10       | 0.900(22.86)      | 1.008(25.6) | 22       | 2.100(53.34)      | 2.213(56.2) |
| 11       | 1.000(25.40)      | 1.106(28.1) | 23       | 2.200(55.88)      | 2.311(58.7) |
| 12       | 1.100(27.94)      | 1.209(30.7) | 24       | 2.300(58.42)      | 2.409(61.2) |
| 13       | 1.200(30.48)      | 1.307(33.2) | 25       | 2.400(60.96)      | 2.512(63.8) |

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X.  $\pm$   
.X  $\pm$   
.XX  $\pm$   
.XXX  $\pm$   
ANG  $\pm$



### ORDER INFORMATION

MCGF-HA-1Xxx-LF

SERIES

LEADFREE

1X02:02WAY

1X25:25WAY

A TYPE  
HOUSING

DESCRIPTION: